


SMA Female to SMA Female RF Bias Tees, **RBTK26S50** 9KHz-26.5GHz, DC 50V, 0.5A

Dimensions(mm) Tolerance $\pm 1\%$

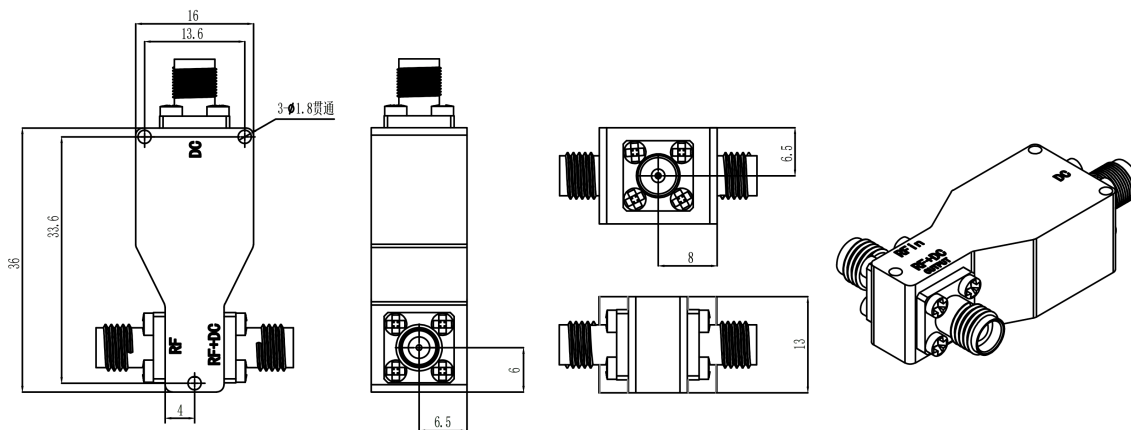

Electrical & Environmental

Frequency Range	9KHz-26.5GHz	Impedance	50 Ohm
VSWR	1.5 Max	Insertion Loss	2.2 dB Max
Voltage	-	Input Avg Power	5 Watts Max @25°C
DC Voltage	50 Volts Max	DC Current	0.5 A Max

Mechanical & Product Information

Product Number	RBTK26S50, H-Grade	Connector	SMA Female to SMA Female, DC Port SMA Female
Connector Body	Gold plated brass	Center Contact	-
Net Weight	-	RoHS	Compliant

Typical Test Data