


SMA Female to SMA Female RF Bias Tees, **RBTK27S50** 30KHz-26.5GHz, DC 50V, 0.3A

Dimensions(mm) Tolerance $\pm 1\%$

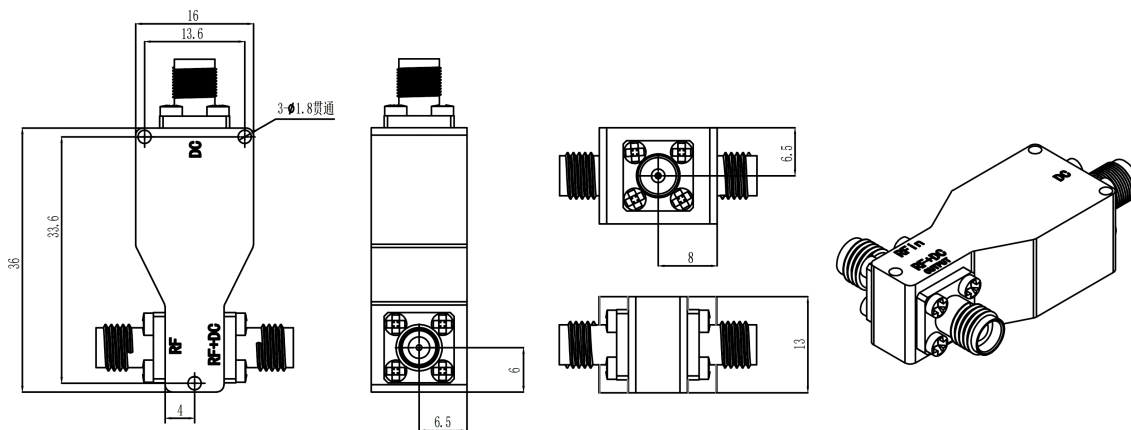

Electrical & Environmental

Frequency Range	30KHz-26.5GHz	Impedance	50 Ohm
VSWR	1.65 Max	Insertion Loss	2.0 dB Max , Typ 1.5dB
Voltage	50 Volts Max	Avg Power	1 Watts Max @25°C
DC Voltage	50 Volts Max	DC Current	0.3 A Max
Isolation	35 dB Min	Group Delay	-

Mechanical & Product Information

Product Number	RBTK27S50, P-Grade	Connector	SMA Female to SMA Female, DC Port SMA Female
Connector Body	Passivated stainless steel	Center Contact	Gold plated beryllium copper
Net Weight	-	RoHS	Compliant

Typical Test Data