




2.4mm Female to 2.4mm Female RF Bias Tees, **RBTK53U50** 30KHz-53GHz, DC 50V, 0.3A

Dimensions(mm) Tolerance $\pm 1\%$

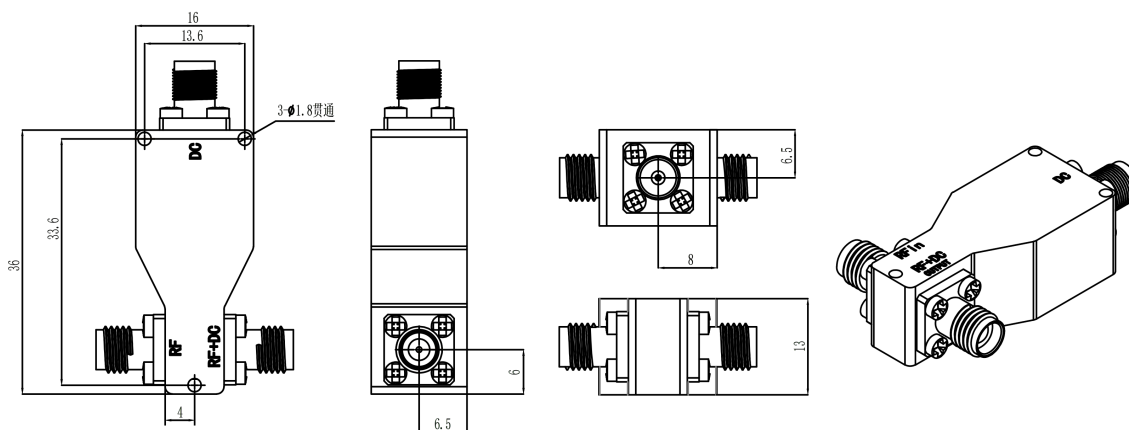

Electrical & Environmental

Frequency Range	30KHz-53GHz	Impedance	50 Ohm
VSWR	1.85 Max	Insertion Loss	3.0 dB Max , Typ 2.5dB
Voltage	50 Volts Max	Avg Power	1 Watts Max @25°C
DC Voltage	50 Volts Max	DC Current	0.3 A Max
Isolation	35 dB Min	Group Delay	-

Mechanical & Product Information

Product Number	RBTK53U50, P-Grade	Connector	2.4mm Female to 2.4mm Female, DC Port SMA Female
Connector Body	Passivated stainless steel	Center Contact	Gold plated beryllium copper
Net Weight	About 41.9g	RoHS	Compliant

Typical Test Data

