


1.85mm Female to 1.85mm Female RF Bias Tees, **RBTK70V25** 30KHz-70GHz, DC 25V, 0.3A

Dimensions(mm) Tolerance $\pm 1\%$

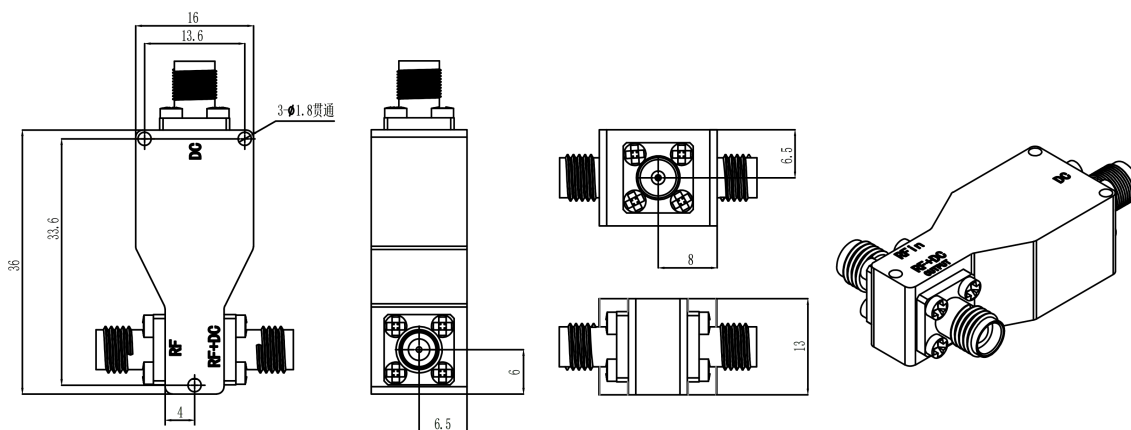

Electrical & Environmental

Frequency Range	30KHz-70GHz	Impedance	50 Ohm
VSWR	1.8 Max	Insertion Loss	3.5 dB Max , Typ 2.0dB
Voltage	-	Input Avg Power	1 Watts Max @25°C
DC Voltage	25 Volts Max	DC Current	0.3 A Max
Isolation	30 dB Min	Group Delay	-

Mechanical & Product Information

Product Number	RBTK70V25, H-Grade	Connector	1.85mm Female to 1.85mm Female, DC Port SMA Female
Connector Body	Passivated stainless steel	Center Contact	-
Net Weight	-	RoHS	Compliant

Typical Test Data