


SMA Diplexer, RFPD140107S-965M
Pass Band 900-930MHz, 950-980MHz

Dimensions(mm) Tolerance±1%

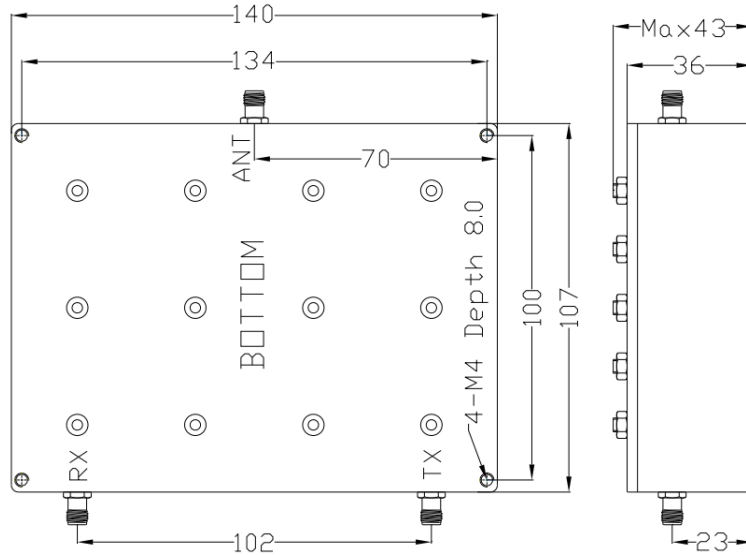

Mechanical & Product Information

Product Number	RFPD140107S-965M	Product Type	Diplexer
Impedance	50 Ohms	Power Handling	30W @25°C
Connector	SMA Female - SMA Female	Connector Body	Ternary alloy plated brass
Housing	6061 Aluminum alloy, Black Paint	Operating Temp.	-30 ~ +70°C
Identification	Port 1: ANT , Port 2: RX , Port 3: TX		
Dimensions	140×107×36mm	Net Weight	About 745.0g

Port Parameter Performance Table

Port/Channel	Pass Band				Stop Band	
	Center Freq.	Pass Band	IL.	Ripple	Reject Freq.	Rejection
RX	915MHz	900-930MHz	≤dB	-	950-980MHz	≥60dB
TX	965MHz	950-980MHz	≤dB	-	900-930MHz	≥60dB



SMA双工器, RFPD140107S-965M

900-930MHz, 950-980MHz, 耦合度dB, 30W, 黄铜镀三元合金

典型实测曲线

