




SMA Diplexer, RFPD19860S-2045M
Pass Band 1710-1810MHz, 1920-2170MHz

Dimensions(mm) Tolerance±1%

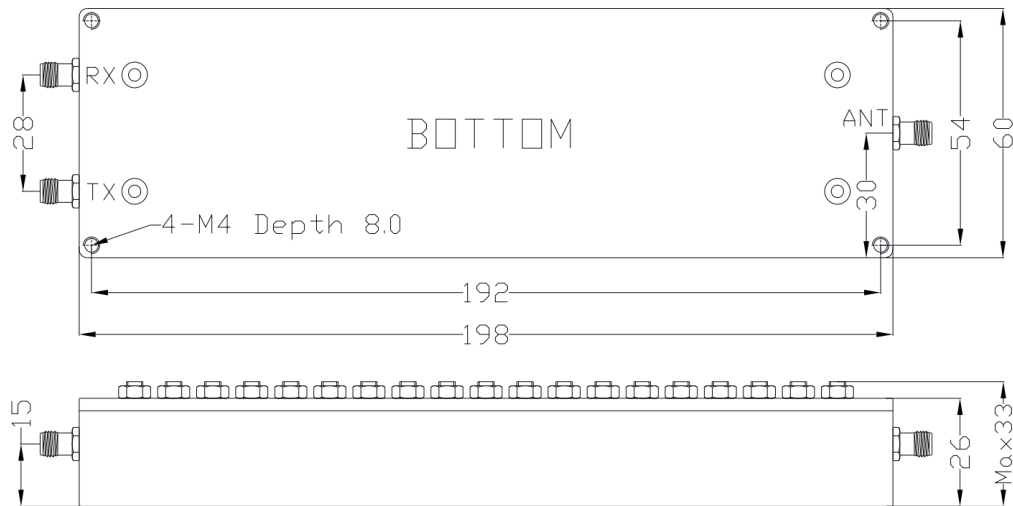

Mechanical & Product Information

Product Number	RFPD19860S-2045M	Product Type	Diplexer
Impedance	50 Ohms	Power Handling	20W @25°C
Connector	SMA Female - SMA Female	Connector Body	Ternary alloy plated brass
Housing	6061 Aluminum alloy, Black Paint	Operating Temp.	-30 ~ +70°C
Identification	Port 1: ANT , Port 2: RX , Port 3: TX		
Dimensions	198×60×26mm	Net Weight	About 476.0g

Port Parameter Performance Table

Port/Channel	Pass Band				Stop Band	
	Center Freq.	Pass Band	IL	Ripple	Reject Freq.	Rejection
RX	1760MHz	1710-1810MHz	≤dB	-	1920-2170MHz	≥55dB
TX	2045MHz	1920-2170MHz	≤dB	-	1710-1810MHz	≥55dB



SMA双工器, RFPD19860S-2045M

1710-1810MHz, 1920-2170MHz, 耦合度dB, 20W, 黄铜镀三元合金

典型实测曲线

