


SMA Diplexer, RFPD6237S-9200M

Pass Band 6750-6850MHz, 9150-9250MHz

Dimensions(mm) Tolerance $\pm 1\%$

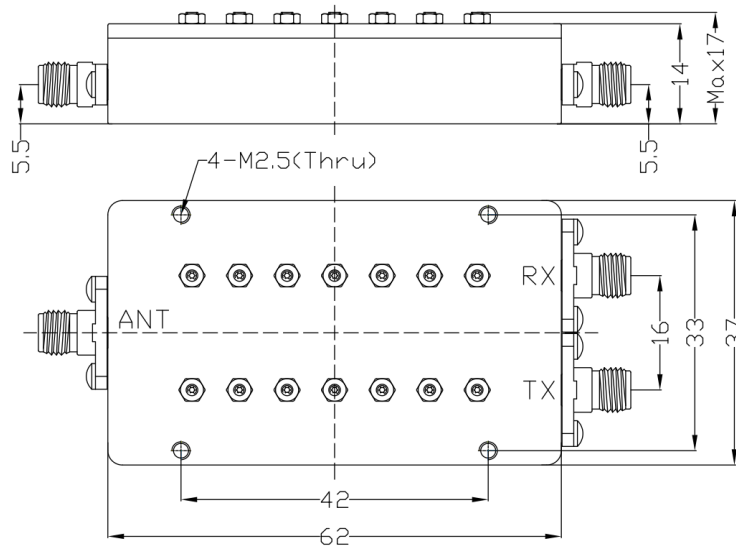

Mechanical & Product Information

Product Number	RFPD6237S-9200M	Product Type	Diplexer
Impedance	50 Ohms	Power Handling	80W @25°C
Isolation	80dB min		
Connector	SMA Female - SMA Female	Connector Body	Passivated stainless steel
Housing	6061 Aluminum alloy, Black Paint	Operating Temp.	-30 ~ +70°C
Identification	Port 1: ANT , Port 2: RX , Port 3: TX		
Dimensions	62×37×14mm	Net Weight	About 165.0g

Port Parameter Performance Table

Port/Channel	Pass Band				Stop Band	
	Center Freq.	Pass Band	IL	Ripple	Reject Freq.	Rejection
RX	6800MHz	6750-6850MHz	≤dB	-	9150-9250MHz	≥80dB
TX	9200MHz	9150-9250MHz	≤dB	-	6750-6850MHz	≥80dB