




SMA Triplexer, RFPT10467S-5640M

Pass Band 1850-1910MHz, 3700-3820MHz, 5550-5730MHz

Dimensions(mm) Tolerance±1%

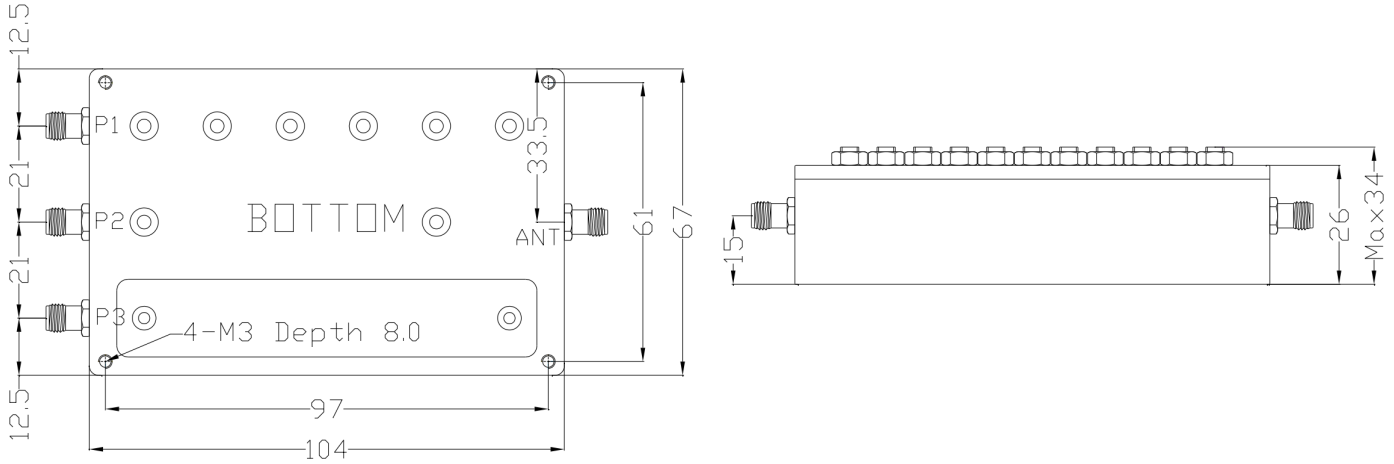

Mechanical & Product Information

Product Number	RFPT10467S-5640M	Product Type	Triplexer
Impedance	50 Ohms	Power Handling	20W @25°C
Connector	SMA Female - SMA Female	Connector Body	Passivated stainless steel
Housing	6061 Aluminum alloy, Black Paint	Operating Temp.	-30 ~ +70°C
Identification	Port 1: ANT , Port 2: P1 , Port 3: P2 , Port 4: P3		
Dimensions	104×67×26mm	Net Weight	About 310.0g

Port Parameter Performance Table

Port/Channel	Pass Band				Stop Band	
	Center Freq.	Pass Band	IL	Ripple	Reject Freq.	Rejection
P1	1880MHz	1850-1910MHz	≤dB	-	3700-5730MHz	≥70dB
P2	3760MHz	3700-3820MHz	≤dB	-	DC-1910MHz, 5550-5730MHz	≥70dB
P3	5640MHz	5550-5730MHz	≤dB	-	DC-3820MHz	≥70dB



SMA三工器, RFPT10467S-5640M

1850-1910MHz, 3700-3820MHz, 5550-5730MHz, 耦合度dB, 20W, 不锈钢

典型实测曲线

