SMA Triplexer, RFPT15792S-2692M
Pass Band 880-915MHz, 1760-1830MHz, 2640-2745MHz

Dimensions(mm) Tolerance±1%

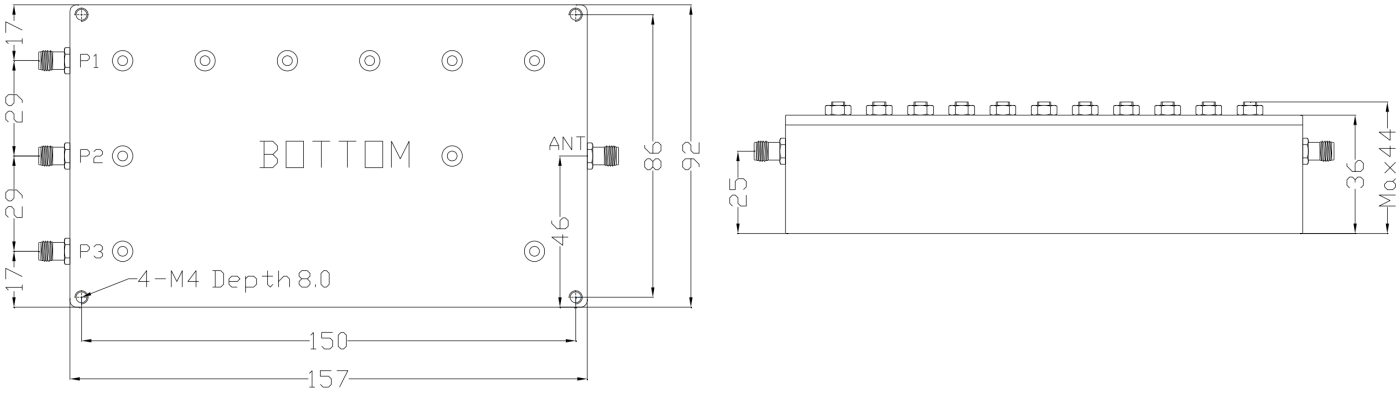

Mechanical & Product Information

Product Number	RFPT15792S-2692M	**Product Type**	Triplexer
Impedance	50 Ohms	**Power Handling**	20W @25°C
Connector	SMA Female - SMA Female	**Connector Body**	Passivated stainless steel
Housing	6061 Aluminum alloy, Black Paint	**Operating Temp.**	-30 ~ +70°C
Identification	Port 1: ANT , Port 2: P1 , Port 3: P2 , Port 4: P3		
Dimensions	157×92×36mm	**Net Weight**	About 705.0g

Port Parameter Performance Table

Port/Channel	Pass Band					Stop Band	
	Center Freq.	Pass Band		IL.	Ripple	Reject Freq.	Rejection
P1	897.5MHz	880-915MHz		≤dB	-	1760-2745MHz	≥70dB
P2	1795MHz	1760-1830MHz		≤dB	-	DC-915MHz, 2640-2745MHz	≥70dB
P3	2692.5MHz	2640-2745MHz		≤dB	-	DC-1830MHz	≥70dB

SMA三工器, RFPT15792S-2692M

880-915MHz, 1760-1830MHz, 2640-2745MHz, 耦合度dB, 20W, 不锈钢
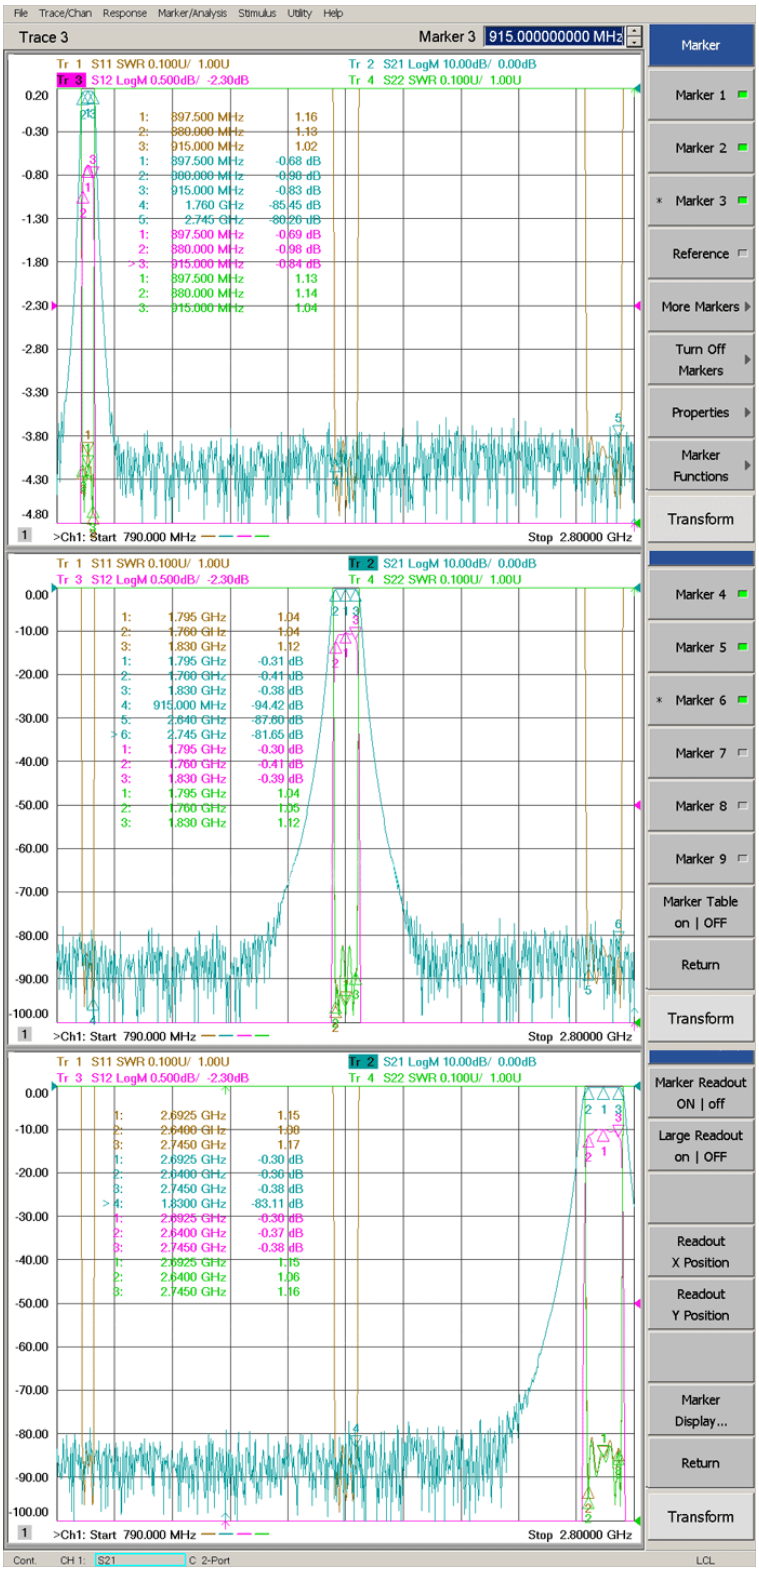
典型实测曲线