




N Triplexer, RFPT278157N-414M

Pass Band 350-370MHz, 806-866MHz, 403-425MHz

Dimensions(mm) Tolerance±1%

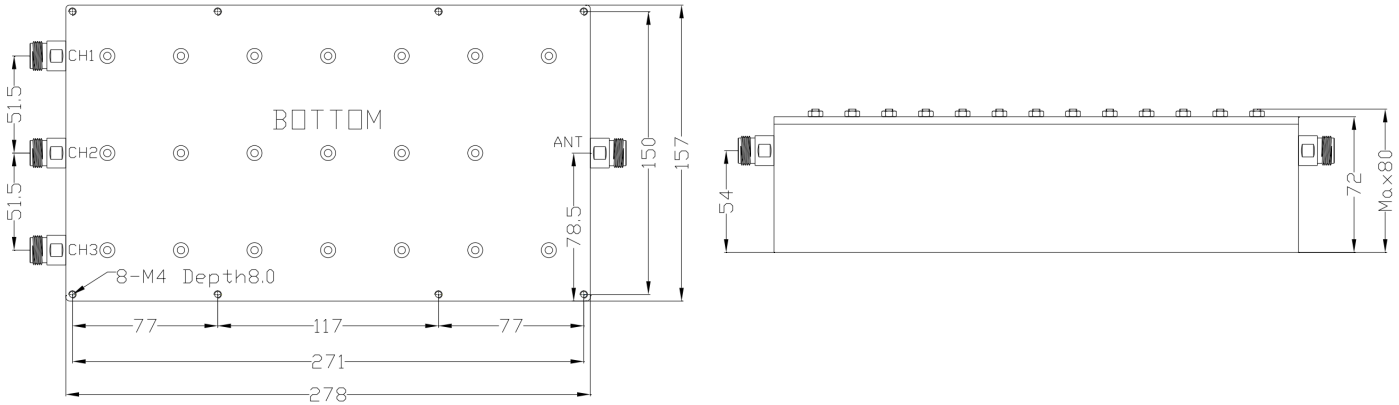

Mechanical & Product Information

Product Number	RFPT278157N-414M	Product Type	Triplexer
Impedance	50 Ohms	Power Handling	50W @25°C
Connector	N Female - N Female	Connector Body	Ternary alloy plated brass
Housing	6061 Aluminum alloy, Black Paint	Operating Temp.	-10 ~ +60°C
Identification	Port 1: ANT , Port 2: P1 , Port 3: P2 , Port 4: P3		
Dimensions	278×157×72mm	Net Weight	About 3.2kg

Port Parameter Performance Table

Port/Channel	Pass Band				Stop Band	
	Center Freq.	Pass Band	IL.	Ripple	Reject Freq.	Rejection
CH1	360MHz	350-370MHz	≤dB	-	403-866MHz	≥70dB
CH2	836MHz	806-866MHz	≤dB	-	350-425MHz	≥70dB
CH3	414MHz	403-425MHz	≤dB	-	350-370MHz, 806-866MHz	≥70dB



N三工器, RFPT278157N-414M

350-370MHz, 806-866MHz, 403-425MHz, 耦合度dB, 50W, 黄铜镀三元合金

典型实测曲线

