# WR75(BJ120) Waveguide Diplexer, RWFPD75-11300M
# Pass Band 10970-11050MHz, 11250-11350MHz

## Dimensions(mm) Tolerance±1%




## Mechanical & Product Information

| | | | |
|---|---|---|---|
| **Product Number** | RWFPD75-11300M | **Product Type** | Waveguide Diplexer |
| **Isolation** | 50dB min | | |
| **Waveguide** | WR75(BJ120), FBP120方形平法兰 | **Waveguide Body** | Aluminum, grey painted |
| **Housing** | Grey paint | **Operating Temp.** | ℃ |
| **Identification** | Port 1: ANT , Port 2: Low , Port 3: High | | |
| **Dimensions** | 202.8×54.7×38mm | **Net Weight** | - |

## Port Parameter Performance Table

| **Port/Channel** | **Pass Band** | | | | **Stop Band** | |
|---|---|---|---|---|---|---|
| | **Center Freq.** | **Pass Band** | **IL.** | **Ripple** | **Reject Freq.** | **Rejection** |
| **Low** | 11010MHz | 10970-11050MHz | ⩽dB | - | | ⩾dB |
| **High** | 11300MHz | 11250-11350MHz | ⩽dB | - | | ⩾dB |

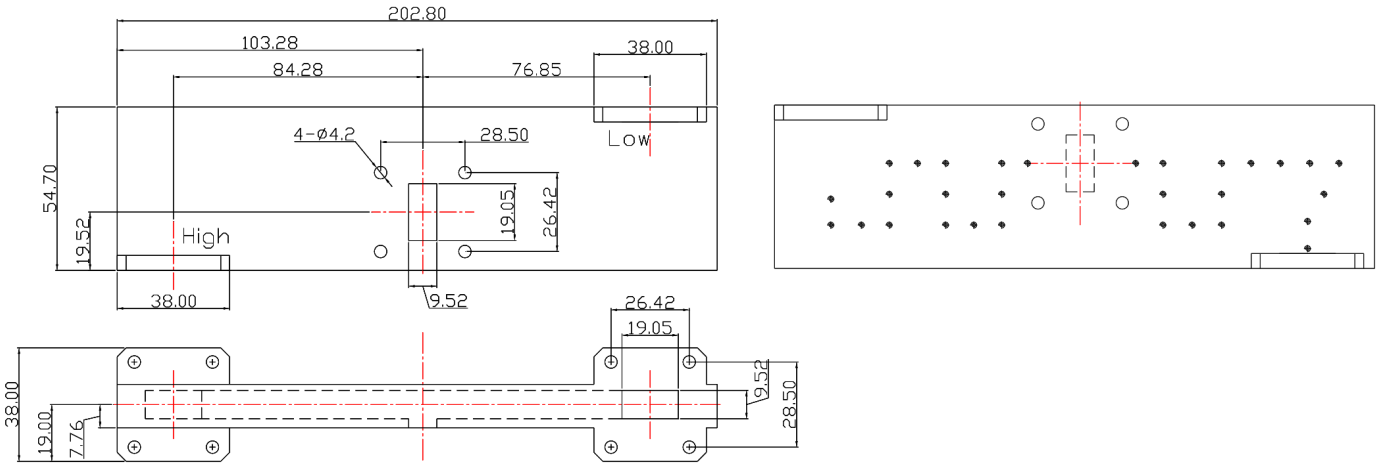

RFTOP® Technology Co., Ltd.
www.rftop.com service@rftop.com 86-755-88840350