


SMA 6 Way Combiner, RCD2F4S6 2-4GHz, 1W , P-Grade

Dimensions(mm) Tolerance±1%

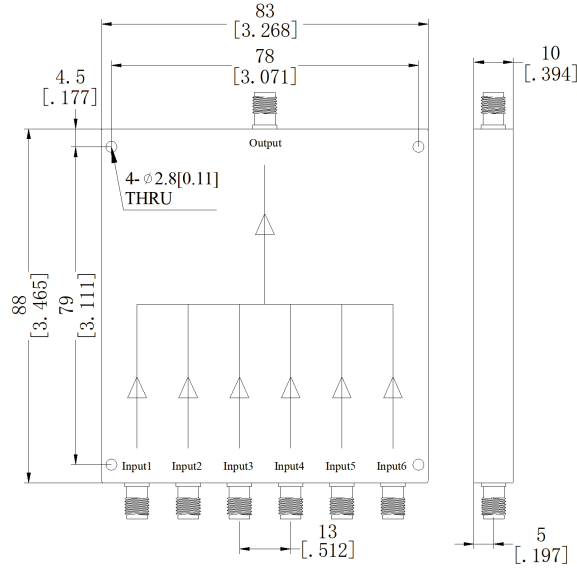

Electrical & Environmental

Frequency Range	2-4GHz	Impedance	50 Ohm
Input Port VSWR	1.3 max		
Output Port VSWR	1.3 max		
Insertion Loss	0.8dB max (Excluding theoretical loss未含理论损耗7.8dB)		
Isolation	20dB min		
Amplitude Balance	± 0.5dB		
Phase Balance	±5°		
Input Avg Power	1 Watts max @25°C (每路输入不大于0.2W)		
Operating Temp	-45°C ~ +85°C		

Mechanical & Product Information

Product Number	RCD2F4S6, P-Grade	Way	6
Connector	SMA Female	Connector Body	Passivated stainless steel
Center Contact	Gold plated beryllium copper		
Housing	Black paint		
Dimensions	88×83×10mm	Net Weight	About 155.0g