


SMA 8 Way Combiner, RCD5085F12075S8 5.85-12.75GHz, 1W

Dimensions(mm) Tolerance±1%

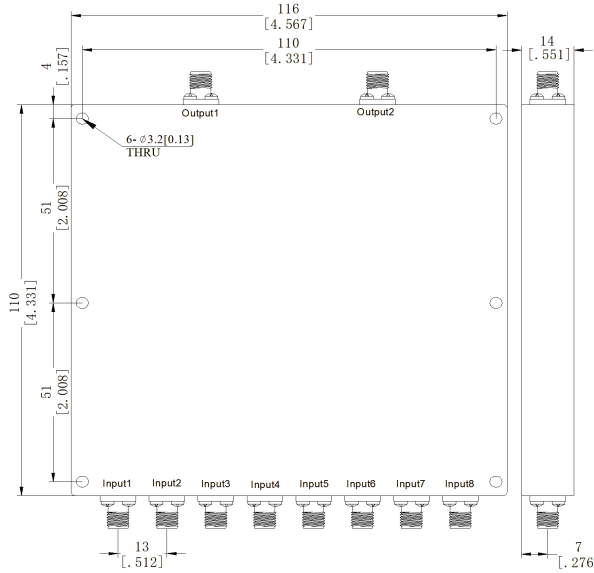

Electrical & Environmental

Frequency Range	5.85-12.75GHz	Impedance	50 Ohm
Input Port VSWR	1.5 max (Typ.1.22)		
Output Port VSWR	1.4 max (Typ.1.18)		
Insertion Loss	3dB max (Excluding theoretical loss未含理论损耗9.0dB)		
Isolation	18dB min (Typ.22dB)		
Amplitude Balance	± 0.6 dB		
Phase Balance	$\pm 8^\circ$		
Input Avg Power	1 Watts max @25°C		
Operating Temp	-45°C ~ +85°C		

Mechanical & Product Information

Product Number	RCD5085F12075S8	Way	8
Connector	SMA Female	Connector Body	Passivated stainless steel
Center Contact	Gold plated beryllium copper		
Housing	Black paint		
Dimensions	110×116×14mm	Net Weight	-