


SMA 4 Way Microstrip Power Divider, RPD00015F003S4 1.5-30MHz, 1W

Dimensions(mm) Tolerance±1%

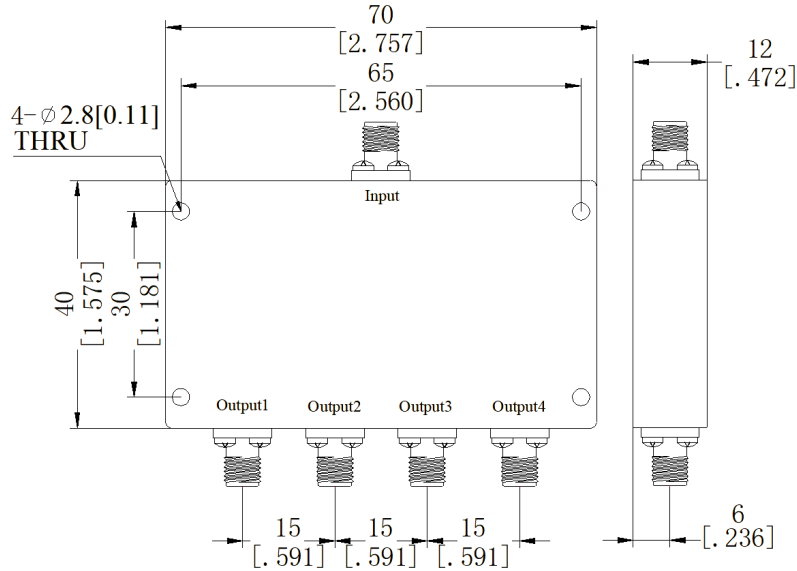

Electrical & Environmental

Frequency Range	1.5-30MHz	Impedance	50 Ohm
Input Port VSWR	1.25 max (Typ.1.15)		
Output Port VSWR	1.4 max (Typ.1.18)		
Insertion Loss	0.6dB max (Excluding theoretical loss未含理论损耗6.0dB)		
Isolation	20dB min (Typ.26dB)		
Amplitude Balance	± 0.4 dB		
Phase Balance	$\pm 4^\circ$		
Input Avg Power	1 Watts max @25°C (Combiner合路器用时0.5W)		
Operating Temp	-35°C ~ +75°C		

Mechanical & Product Information

Product Number	RPD00015F003S4	Way	4
Connector	SMA Female	Connector Body	Ternary alloy plated brass
Center Contact	Gold plated beryllium copper		
Housing	Sandblasting natural color conductive oxide		
Dimensions	40×70×12mm	Net Weight	About 90.0g