


## SMA 8 Way Microstrip Power Divider, RPD00015F003S8-1 1.5-30MHz, 2W

### Dimensions(mm) Tolerance±1%

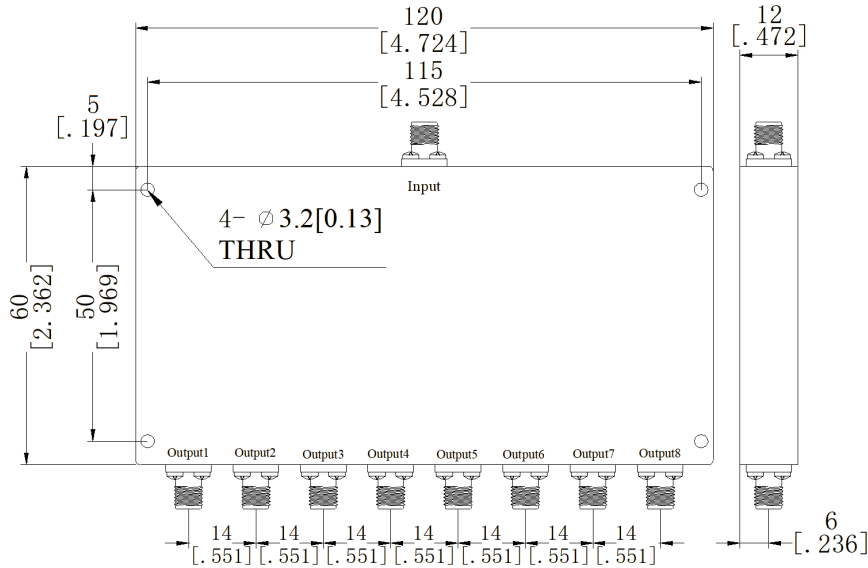

### Electrical & Environmental

<b>Frequency Range</b>	1.5-30MHz	<b>Impedance</b>	50 Ohm
<b>Input Port VSWR</b>	1.15 max (Typ.1.09)		
<b>Output Port VSWR</b>	1.15 max (Typ.1.08)		
<b>Insertion Loss</b>	18dB max (包含理论损耗)		
<b>Isolation</b>	17.5dB min		
<b>Amplitude Balance</b>	± 0.3dB		
<b>Phase Balance</b>	±3°		
<b>Input Avg Power</b>	2 Watts max @25°C (Derate linearly to 0.2 Watt at 100°C)		
<b>Operating Temp</b>	-35°C ~ +75°C		

### Mechanical & Product Information

<b>Product Number</b>	RPD00015F003S8-1	<b>Way</b>	8
<b>Connector</b>	SMA Female	<b>Connector Body</b>	Ternary alloy plated brass
<b>Center Contact</b>	Gold plated beryllium copper		
<b>Housing</b>	Black paint		
<b>Dimensions</b>	120×60×12mm	<b>Net Weight</b>	About 220.0g