


SMA 8 Way Microstrip Power Divider, RPD00015F003S8 1.5-30MHz, 1W

Dimensions(mm) Tolerance±1%

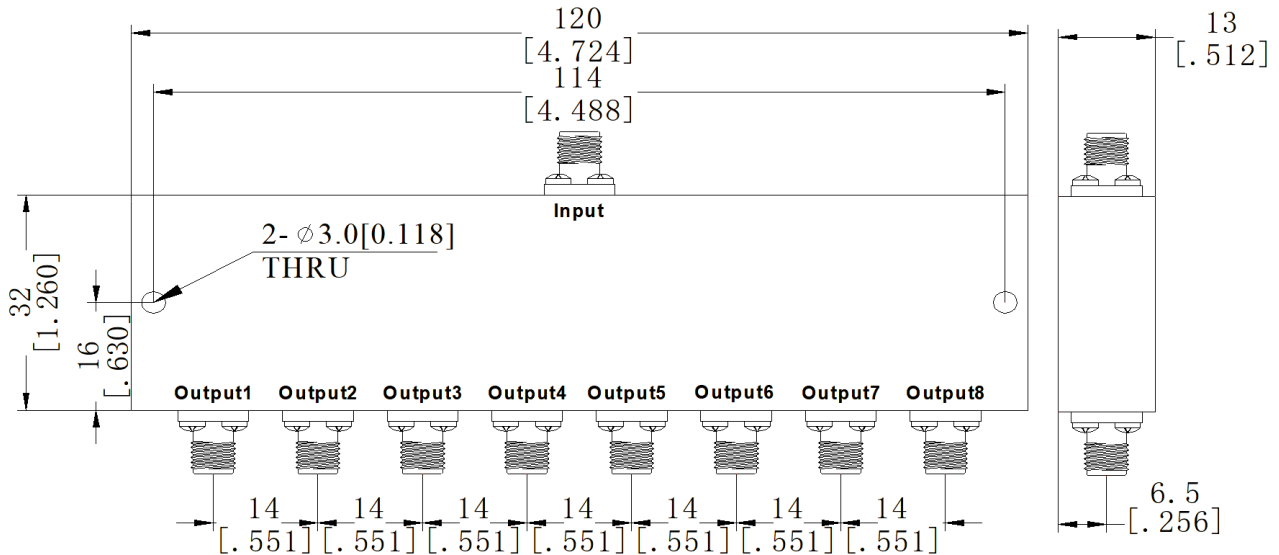

Electrical & Environmental

Frequency Range	1.5-30MHz	Impedance	50 Ohm
Input Port VSWR	1.4 max (5-30M) ; 1.8max (1.5-5M)		
Output Port VSWR	1.4 max (5-30M) ; 1.8max (1.5-5M)		
Insertion Loss	1.6dB max (Excluding theoretical loss未含理论损耗9.0dB)		
Isolation	18dB min (Typ.26dB)		
Amplitude Balance	± 0.4dB		
Phase Balance	±6°		
Input Avg Power	1 Watts max @25°C (Combiner合路器用时0.5W)		
Operating Temp	-35°C ~ +75°C		

Mechanical & Product Information

Product Number	RPD00015F003S8	Way	8
Connector	SMA Female	Connector Body	Ternary alloy plated brass
Center Contact	Gold plated beryllium copper		
Housing	Sandblasting natural color conductive oxide		
Dimensions	120×32×13mm	Net Weight	About 200.0g