


SMA 16 Way Microstrip Power Divider, RPD0001F005S16 1-50MHz, 1W, E-Grade

Dimensions(mm) Tolerance±1%

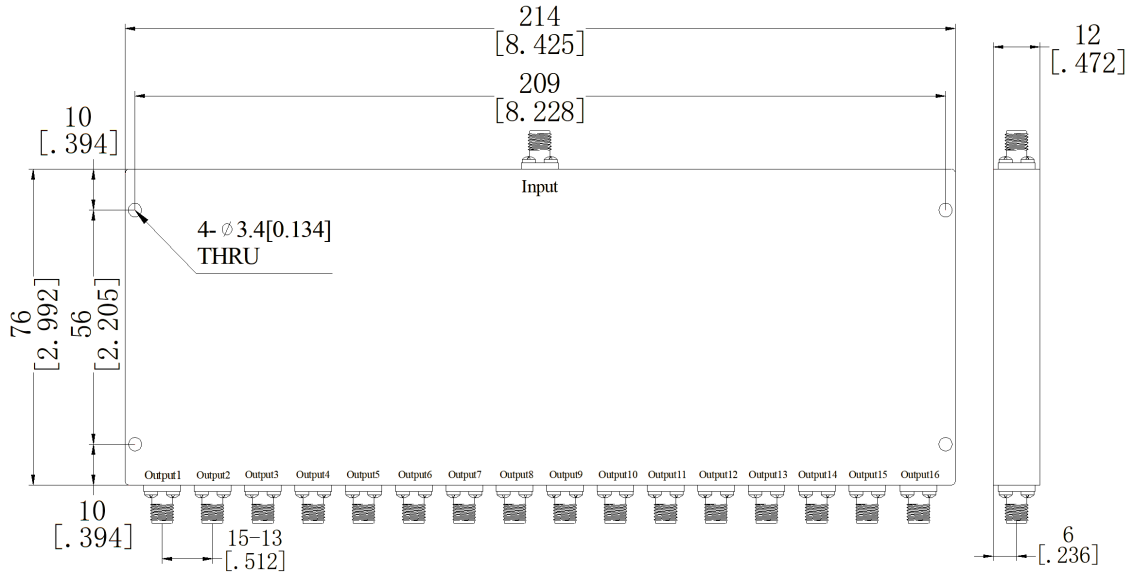

Electrical & Environmental

Frequency Range	1-50MHz	Impedance	50 Ohm
Input Port VSWR	1.5 max		
Output Port VSWR	1.5 max		
Insertion Loss	2.4dB max (Excluding theoretical loss未含理论损耗12.0dB)		
Isolation	18dB min (Typ.26dB)		
Amplitude Balance	± 0.8 dB		
Phase Balance	$\pm 8^\circ$		
Input Avg Power	1 Watts max @25°C (Combiner合路器用时0.5W)		
Operating Temp	-35°C ~ +75°C		

Mechanical & Product Information

Product Number	RPD0001F005S16, E-Grade	Way	16
Connector	SMA Female	Connector Body	Ternary alloy plated brass
Center Contact	Gold plated beryllium copper		
Housing	Sandblasting natural color conductive oxide		
Dimensions	76×214×12mm	Net Weight	-