


SMA 4 Way Resistive Power Divider, RPD001F3S4 10-3000MHz, 2W

Dimensions(mm) Tolerance±1%

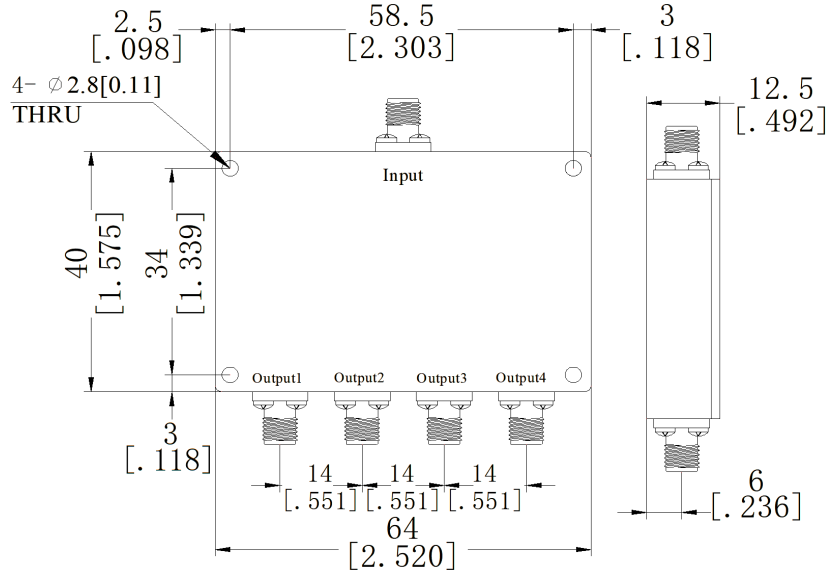

Electrical & Environmental

Frequency Range	10-3000MHz	Impedance	50 Ohm
Input Port VSWR	1.2 max (Typ.1.11)		
Output Port VSWR	1.2 max (Typ.1.11)		
Insertion Loss	13dB max		
Isolation	5.6dB min		
Amplitude Balance	± 0.4dB		
Phase Balance	±4°		
Input Avg Power	2 Watts max @25°C (Derate linearly to 0.2 Watt at 100°C)		
Operating Temp	-35°C ~ +75°C		

Mechanical & Product Information

Product Number	RPD001F3S4	Way	4
Connector	SMA Female	Connector Body	Ternary alloy plated brass
Center Contact	Gold plated beryllium copper		
Housing	Sandblasting natural color conductive oxide		
Dimensions	40×64×12.5mm	Net Weight	About 85.0g

SMA 4 Way Resistive Power Divider, RPD001F3S4 10-3000MHz, 2W

Typical Test Data

