


SMA 5 Way Resistive Power Divider, RPD002F3S5 20-3000MHz, 2W

Dimensions(mm) Tolerance $\pm 1\%$

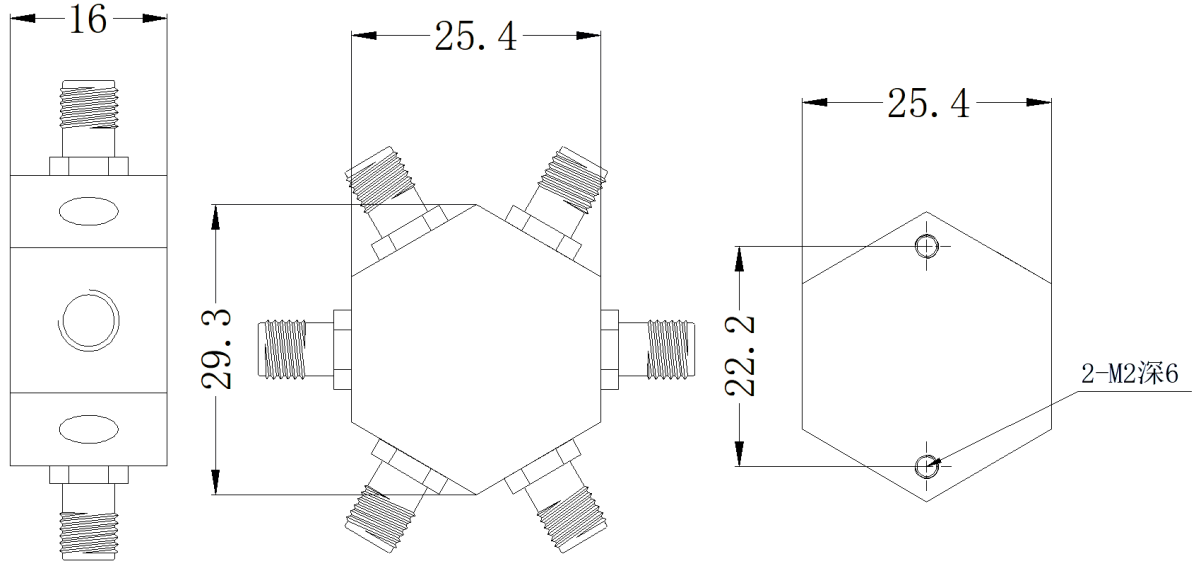

Electrical & Environmental

Frequency Range	20-3000MHz	Impedance	50 Ohm
Input Port VSWR	1.25 max		
Output Port VSWR	1.25 max		
Insertion Loss	15dB max ± 1 dB		
Isolation	14dB min		
Amplitude Balance	± 0.6 dB		
Input Avg Power	2 Watts max @25°C (Derate linearly to 0.2 Watt at 100°C)		
Operating Temp	-35°C ~ +75°C		

Mechanical & Product Information

Product Number	RPD002F3S5	Way	5
Connector	SMA Female	Connector Body	Ternary alloy plated brass
Center Contact	Gold plated beryllium copper		
Housing	Black paint		
Dimensions	29.3×25.4×16mm	Net Weight	-