


N 2 Way Microstrip Power Divider, RPD003F041N2W200 30-410MHz, 200W , P-Grade

Dimensions(mm) Tolerance $\pm 1\%$

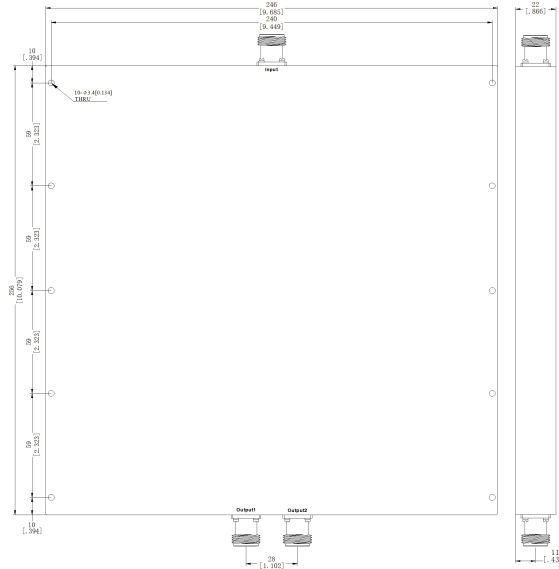

Electrical & Environmental

Frequency Range	30-410MHz	Impedance	50 Ohm
Input Port VSWR	1.25 max		
Output Port VSWR	1.2 max		
Insertion Loss	1dB max (Excluding theoretical loss未含理论损耗3.0dB)		
Isolation	20dB min		
Amplitude Balance	± 0.1 dB		
Phase Balance	$\pm 3^\circ$		
Input Avg Power	200 Watts max @25°C (Derate linearly to 20 Watt at 100°C) (Combiner合路器用时20W)		
Operating Temp	-35°C ~ +75°C		

Mechanical & Product Information

Product Number	RPD003F041N2W200, P-Grade	Way	2
Connector	N Female	Connector Body	Passivated stainless steel
Center Contact	Gold plated beryllium copper		
Housing	Sandblasting natural color conductive oxide		
Dimensions	256×246×22mm	Net Weight	About 1.2kg