


SMA 8 Way Microstrip Power Divider, RPD008F05S8 80-500MHz, 30W , P-Grade

Dimensions(mm) Tolerance±1%

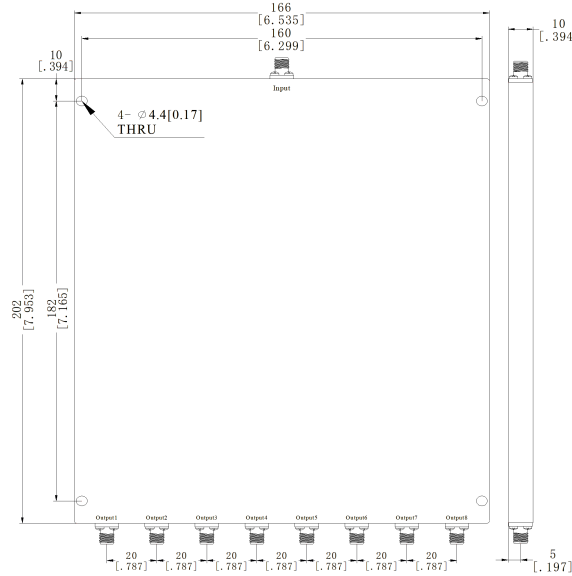

Electrical & Environmental

Frequency Range	80-500MHz	Impedance	50 Ohm
Input Port VSWR	1.25 max (Typ.1.18)		
Output Port VSWR	1.2 max (Typ.1.13)		
Insertion Loss	1.8dB max (Excluding theoretical loss未含理论损耗9.0dB)		
Isolation	20dB min (Typ.25dB)		
Amplitude Balance	± 0.2 dB		
Phase Balance	$\pm 3^\circ$		
Input Avg Power	30 Watts max @25°C (Derate linearly to 3 Watt at 100°C) (Combiner合路器用时2W)		
Operating Temp	-45°C ~ +85°C		

Mechanical & Product Information

Product Number	RPD008F05S8, P-Grade	Way	8
Connector	SMA Female	Connector Body	Passivated stainless steel
Center Contact	Gold plated beryllium copper		
Housing	Blue paint		
Dimensions	202×166×10mm	Net Weight	About 800.0g