


N 2 Way Microstrip Power Divider, RPD0138F207N2 138-2700MHz, 20W , P-Grade

Dimensions(mm) Tolerance±1%

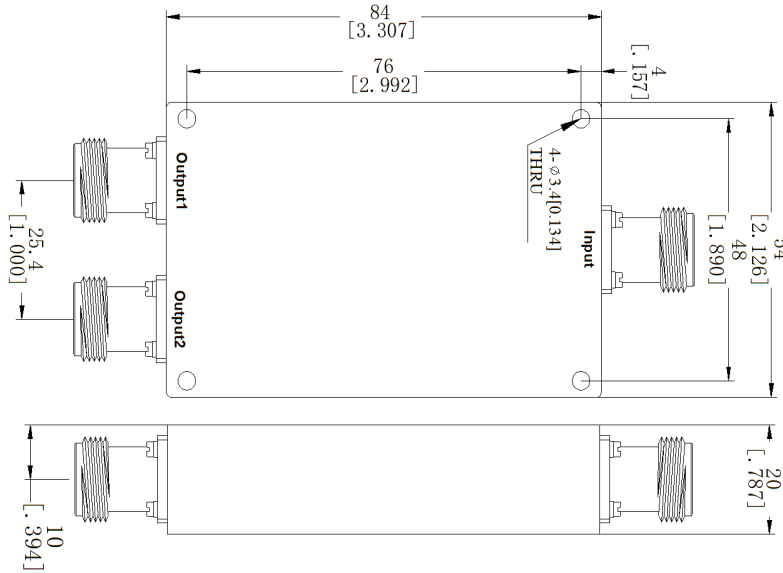

Electrical & Environmental

Frequency Range	138-2700MHz	Impedance	50 Ohm
Input Port VSWR	1.25 max		
Output Port VSWR	1.2 max		
Insertion Loss	1.6dB max (Excluding theoretical loss未含理论损耗3.0dB)		
Isolation	20dB min		
Amplitude Balance	± 0.2dB		
Phase Balance	±3°		
Input Avg Power	20 Watts max @25°C (Derate linearly to 2 Watt at 100°C) (Combiner合路器用时2W)		
Operating Temp	-45°C ~ +85°C		

Mechanical & Product Information

Product Number	RPD0138F207N2, P-Grade	Way	2
Connector	N Female	Connector Body	Passivated stainless steel
Center Contact	Gold plated beryllium copper		
Housing	Black paint		
Dimensions	84×54×20mm	Net Weight	About 200.0g