


N 2 Way Microstrip Power Divider, RPD01F05N2W50 100-500MHz, 50W , E-Grade

Dimensions(mm) Tolerance±1%

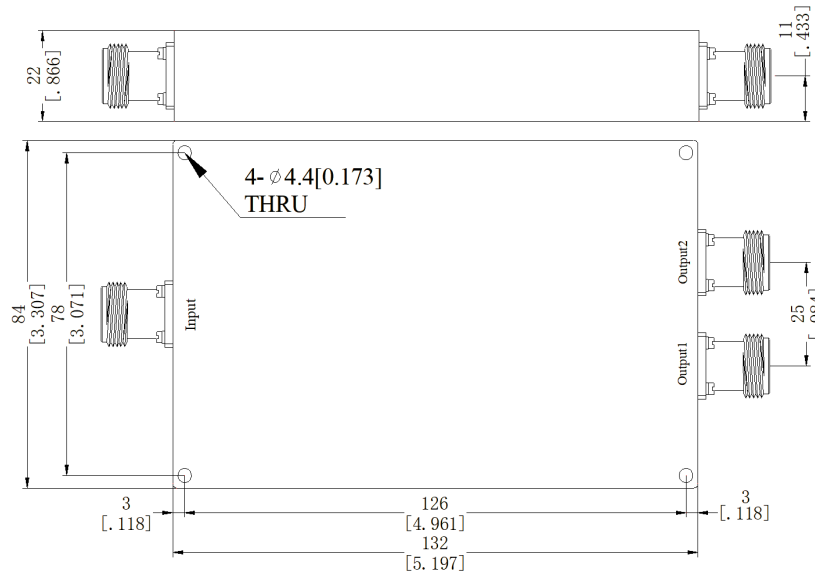

Electrical & Environmental

Frequency Range	100-500MHz	Impedance	50 Ohm
Input Port VSWR	1.2 max (Typ.1.18)		
Output Port VSWR	1.2 max (Typ.1.14)		
Insertion Loss	0.5dB max (Excluding theoretical loss未含理论损耗3.0dB)		
Isolation	20dB min (Typ.26dB)		
Amplitude Balance	± 0.2 dB		
Phase Balance	$\pm 2^\circ$		
Input Avg Power	50 Watts max @25°C (Derate linearly to 5 Watt at 100°C) (Combiner合路器用时3W)		
Operating Temp	-35°C ~ +75°C		

Mechanical & Product Information

Product Number	RPD01F05N2W50, E-Grade	Way	2
Connector	N Female	Connector Body	Ternary alloy plated brass
Center Contact	Gold plated beryllium copper		
Housing	Sandblasting natural color conductive oxide		
Dimensions	132×84×22mm	Net Weight	About 470.0g

N 2 Way Microstrip Power Divider, RPD01F05N2W50 100-500MHz, 50W , E-Grade

Typical Test Data

