


N 2 Way Microstrip Power Divider, RPD01F08N2W1000 100-800MHz, 1000W

Dimensions(mm) Tolerance $\pm 1\%$

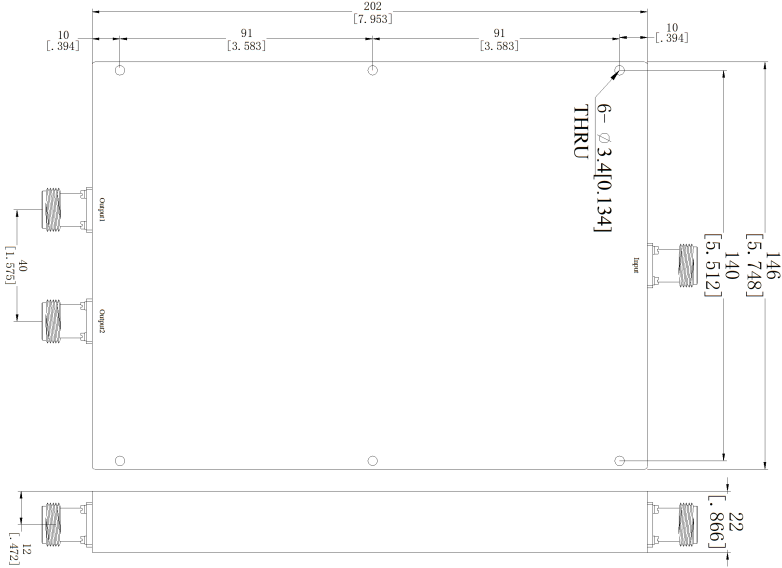

Electrical & Environmental

Frequency Range	100-800MHz	Impedance	50 Ohm
Input Port VSWR	1.25 max (Typ.1.18)		
Output Port VSWR	1.2 max (Typ.1.12)		
Insertion Loss	0.8dB max (Excluding theoretical loss未含理论损耗3.0dB)		
Isolation	20dB min (Typ.26dB)		
Amplitude Balance	± 0.2 dB		
Phase Balance	$\pm 2^\circ$		
Input Avg Power	1000 Watts max @25°C (Derate linearly to 100 Watt at 100°C) (Combiner合路器用时50W)		
Operating Temp	-35°C ~ +75°C		

Mechanical & Product Information

Product Number	RPD01F08N2W1000	Way	2
Connector	N Female	Connector Body	Ternary alloy plated brass
Center Contact	Gold plated beryllium copper		
Housing	Sandblasting natural color conductive oxide		
Dimensions	202×146×22mm	Net Weight	-