


SMA 24 Way Microstrip Power Divider, RPD01F2S24 100-2000MHz, 20W , P-Grade

Dimensions(mm) Tolerance±1%

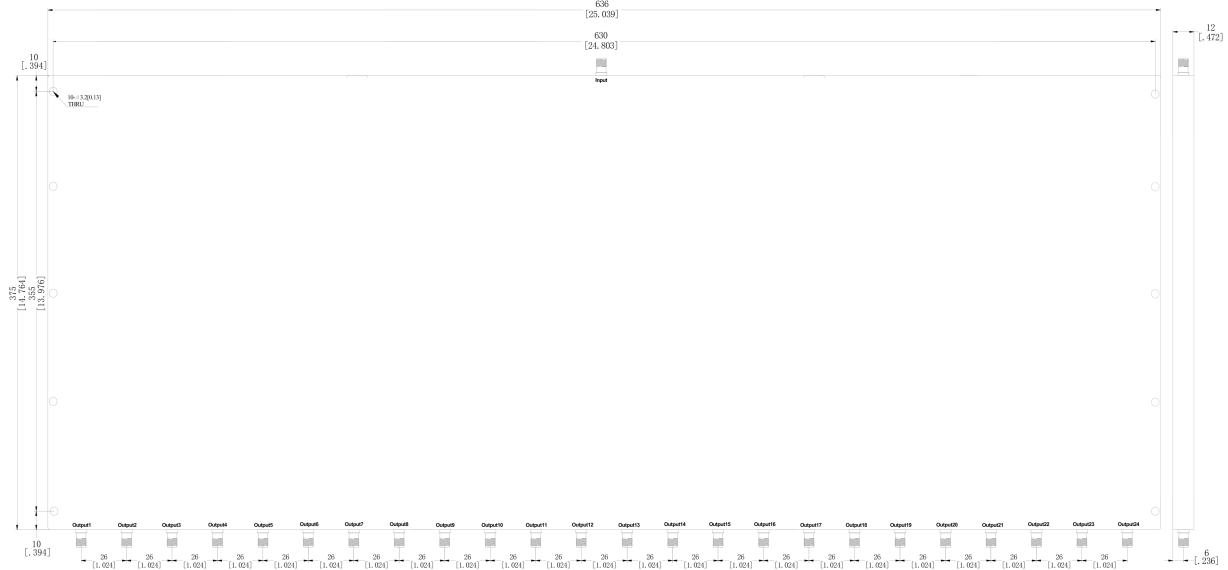

Electrical & Environmental

Frequency Range	100-2000MHz	Impedance	50 Ohm
Input Port VSWR	1.5 max (Typ.1.19)		
Output Port VSWR	1.3 max (Typ.1.15)		
Insertion Loss	21.6dB max (包含理论损耗)		
Isolation	18dB min (Typ.25dB)		
Amplitude Balance	± 0.5dB		
Phase Balance	±3°		
Input Avg Power	20 Watts max @25°C (Derate linearly to 2 Watt at 100°C) (Combiner合路器用时1W)		
Operating Temp	-45°C ~ +85°C		

Mechanical & Product Information

Product Number	RPD01F2S24, P-Grade	Way	24
Connector	SMA Female	Connector Body	Passivated stainless steel
Center Contact	Gold plated beryllium copper		
Housing	Black paint		
Dimensions	375×636×12mm	Net Weight	-