


SMA 32 Way Microstrip Power Divider, RPD022F207S32 220-2700MHz, 30W , P-Grade

Dimensions(mm) Tolerance±1%

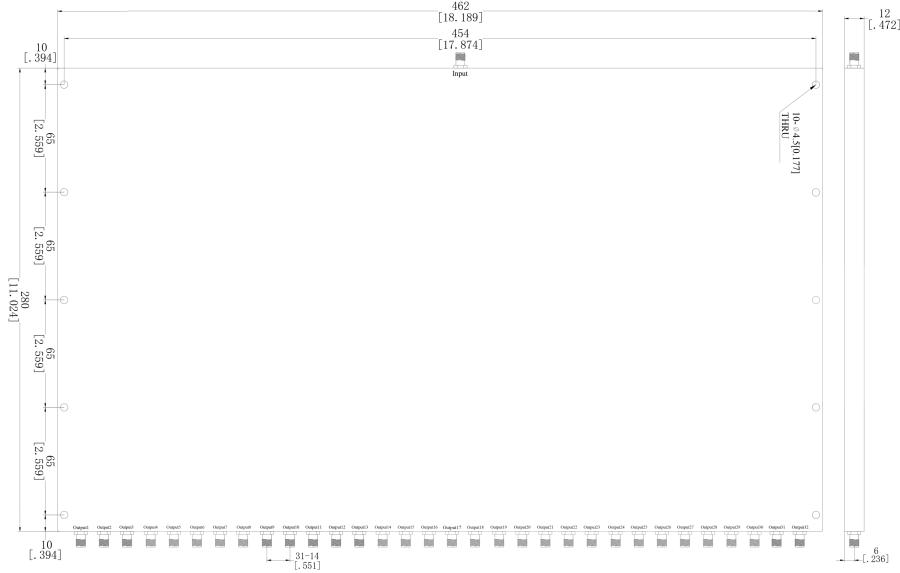

Electrical & Environmental

Frequency Range	220-2700MHz	Impedance	50 Ohm
Input Port VSWR	1.5 max (Typ.1.19)		
Output Port VSWR	1.25 max (Typ.1.15)		
Insertion Loss	5dB max (Excluding theoretical loss未含理论损耗15.0dB)		
Isolation	18dB min (Typ.26dB)		
Amplitude Balance	± 0.5dB		
Phase Balance	±10°		
Input Avg Power	30 Watts max @25°C (Derate linearly to 3 Watt at 100°C) (Combiner合路器用时2W)		
Operating Temp	-35°C ~ +75°C		

Mechanical & Product Information

Product Number	RPD022F207S32, P-Grade	Way	32
Connector	SMA Female	Connector Body	Ternary alloy plated brass
Center Contact	Gold plated beryllium copper		
Housing	Sandblasting natural color conductive oxide		
Dimensions	280×462×12mm	Net Weight	About 3.0kg