


## SMA 2 Way Microstrip Power Divider, RPD038F406S2 380-4600MHz, 30W , E-Grade

### Dimensions(mm) Tolerance $\pm 1\%$

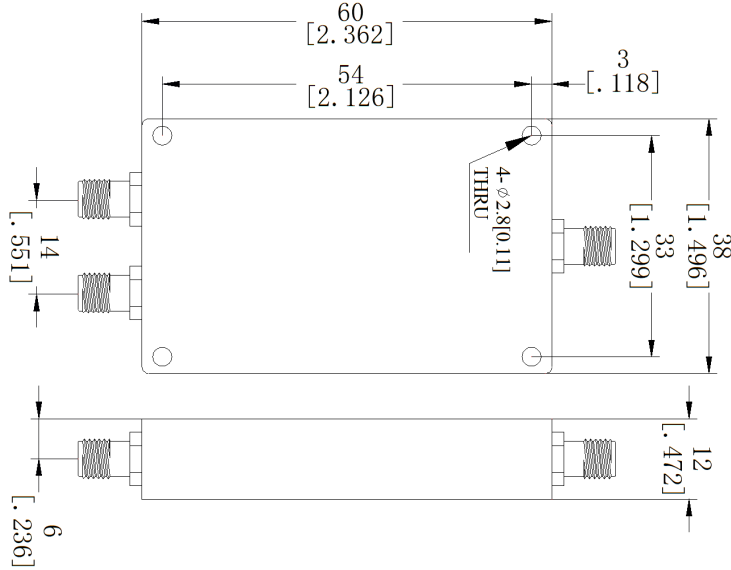

### Electrical & Environmental

<b>Frequency Range</b>	380-4600MHz	<b>Impedance</b>	50 Ohm
<b>Input Port VSWR</b>	1.25 max (Typ.1.18)		
<b>Output Port VSWR</b>	1.2 max (Typ.1.12)		
<b>Insertion Loss</b>	1dB max (Excluding theoretical loss未含理论损耗3.0dB)		
<b>Isolation</b>	20dB min		
<b>Amplitude Balance</b>	$\pm 0.2$ dB		
<b>Phase Balance</b>	$\pm 3^\circ$		
<b>Input Avg Power</b>	30 Watts max @25°C (Derate linearly to 3 Watt at 100°C) (Combiner合路器用时2W)		
<b>Operating Temp</b>	-35°C ~ +75°C		

### Mechanical & Product Information

<b>Product Number</b>	RPD038F406S2, E-Grade	<b>Way</b>	2
<b>Connector</b>	SMA Female	<b>Connector Body</b>	Ternary alloy plated brass
<b>Center Contact</b>	Gold plated beryllium copper		
<b>Housing</b>	Sandblasting natural color conductive oxide		
<b>Dimensions</b>	60×38×12mm	<b>Net Weight</b>	About 55.0g