


SMA 2 Way Microstrip Power Divider, RPD038F6S2 380MHz-6GHz, 30W, E-Grade

Dimensions(mm) Tolerance $\pm 1\%$

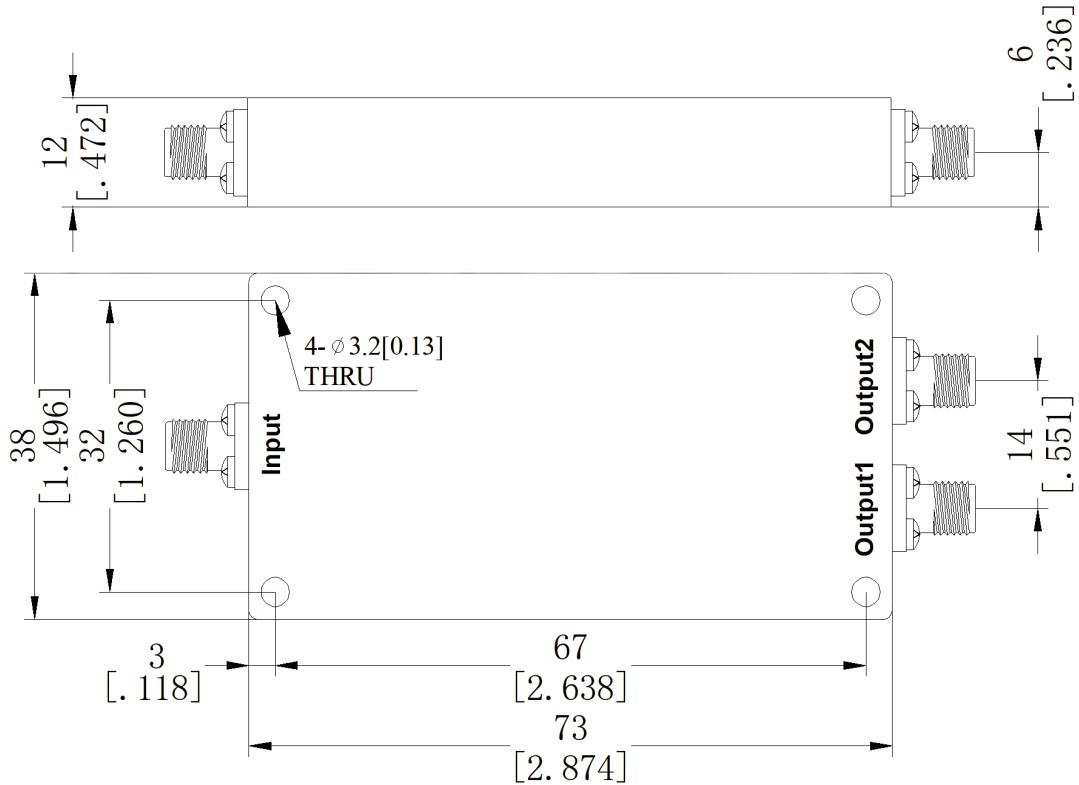

Electrical & Environmental

Frequency Range	380MHz-6GHz	Impedance	50 Ohm
Input Port VSWR	1.25 max (Typ.1.18)	Output Port VSWR	1.2 max (Typ.1.16)
Insertion Loss	1.2dB max (Excluding theoretical loss未含理论损耗3.0dB)		
Isolation	20dB min (Typ.28dB)		
Amplitude Balance	± 0.2 dB	Phase Balance	$\pm 3^\circ$
Input Avg Power	30 Watts max @25°C (Derate linearly to 3 Watt at 100°C)		
Operating Temp	-35°C ~ +75°C		

Mechanical & Product Information

Product Number	RPD038F6S2, E-Grade	Way	2
Connector	SMA Female	Connector Body	Passivated stainless steel
Center Contact	Gold plated beryllium copper		
Housing	Black paint		
Dimensions	73×38×12mm	Net Weight	About 80.0g