


TNC 4 Way Microstrip Power Divider, RPD03F06T4 300-600MHz, 20W , P-Grade

Dimensions(mm) Tolerance $\pm 1\%$

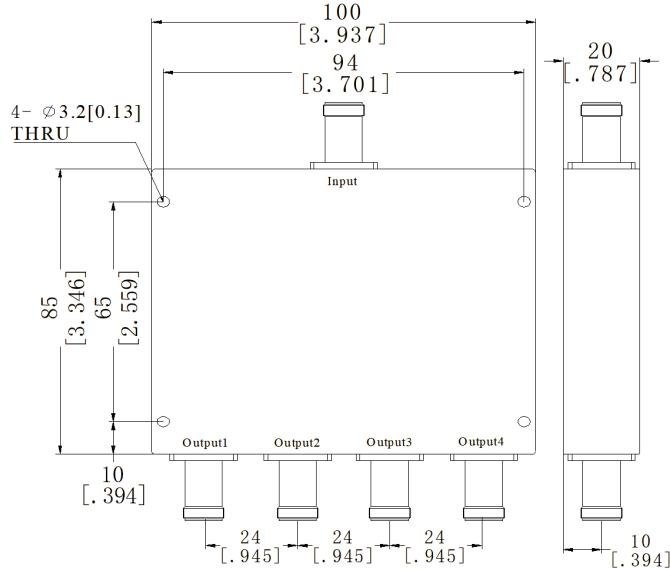

Electrical & Environmental

Frequency Range	300-600MHz	Impedance	50 Ohm
Input Port VSWR	1.2 max (Typ.1.12)		
Output Port VSWR	1.2 max (Typ.1.12)		
Insertion Loss	0.5dB max (Excluding theoretical loss未含理论损耗6.0dB)		
Isolation	20dB min (Typ.25dB)		
Amplitude Balance	± 0.2 dB		
Phase Balance	$\pm 2^\circ$		
Input Avg Power	20 Watts max @25°C (Derate linearly to 2 Watt at 100°C) (Combiner合路器用时1W)		
Operating Temp	-45°C ~ +85°C		

Mechanical & Product Information

Product Number	RPD03F06T4, P-Grade	Way	4
Connector	TNC Female	Connector Body	Passivated stainless steel
Center Contact	Gold plated beryllium copper		
Housing	Black paint		
Dimensions	85×100×20mm	Net Weight	About 220.0g