


BNC 3 Way Microstrip Power Divider, RPD047F086B3 470-860MHz, 30W , P-Grade

Dimensions(mm) Tolerance±1%

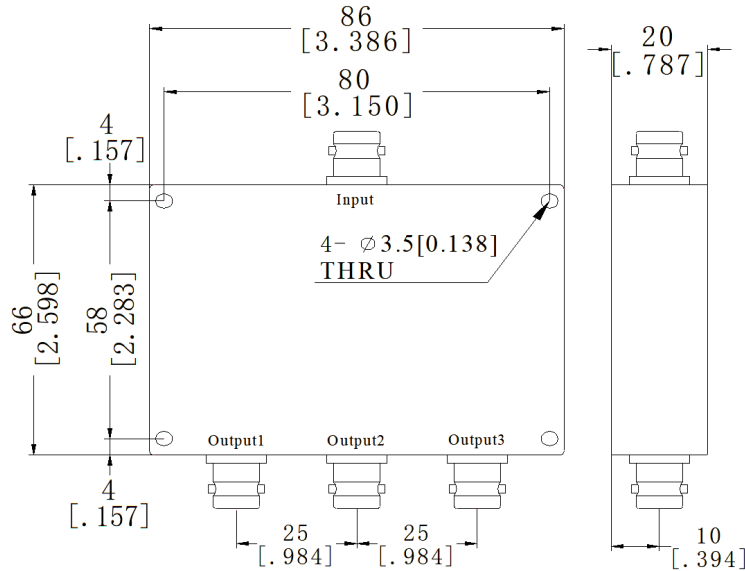

Electrical & Environmental

Frequency Range	470-860MHz	Impedance	50 Ohm
Input Port VSWR	1.2 max (Typ.1.16)		
Output Port VSWR	1.2 max (Typ.1.12)		
Insertion Loss	0.5dB max (Excluding theoretical loss未含理论损耗4.8dB)		
Isolation	22dB min (Typ.26dB)		
Amplitude Balance	± 0.3dB		
Phase Balance	±3°		
Input Avg Power	30 Watts max @25°C (Derate linearly to 3 Watt at 100°C) (Combiner合路器用时2W)		
Operating Temp	-45°C ~ +85°C		

Mechanical & Product Information

Product Number	RPD047F086B3, P-Grade	Way	3
Connector	BNC Female	Connector Body	Passivated stainless steel
Center Contact	Gold plated beryllium copper		
Housing	Blue paint		
Dimensions	86×58×20mm	Net Weight	About 260.0g