


N 2 Way Microstrip Power Divider, RPD04F6N2W50 0.4-6GHz, 50W , P-Grade

Dimensions(mm) Tolerance±1%

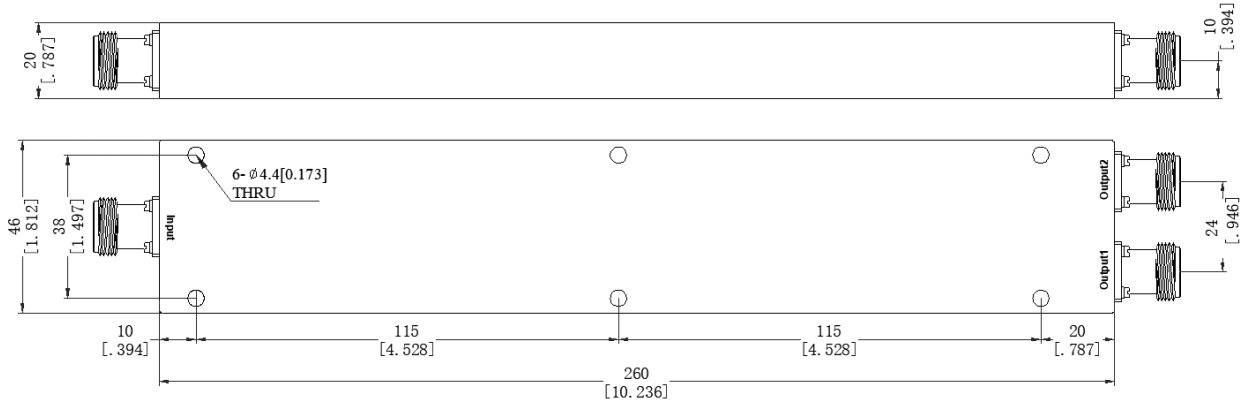

Electrical & Environmental

Frequency Range	0.4-6GHz	Impedance	50 Ohm
Input Port VSWR	1.45 max (Typ.1.16)		
Output Port VSWR	1.25 max (Typ.1.12)		
Insertion Loss	1.8dB max (Excluding theoretical loss未含理论损耗3.0dB)		
Isolation	17dB min (Typ.26dB)		
Amplitude Balance	± 0.2dB		
Phase Balance	±3°		
Input Avg Power	50 Watts max @25°C (Derate linearly to 5 Watt at 100°C) (Combiner合路器用时3W)		
Operating Temp	-35°C ~ +75°C		

Mechanical & Product Information

Product Number	RPD04F6N2W50, P-Grade	Way	2
Connector	N Female	Connector Body	Ternary alloy plated brass
Center Contact	Gold plated beryllium copper		
Housing	Black paint		
Dimensions	260×46×20mm	Net Weight	About 600.0g