


BNC 4 Way Microstrip Power Divider, RPD05F075B4 500-750MHz, 30W , E-Grade

Dimensions(mm) Tolerance±1%

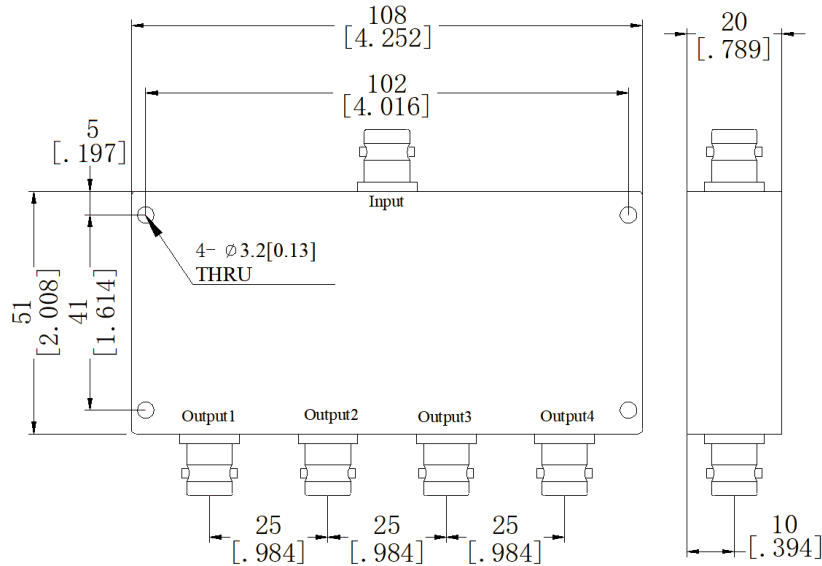

Electrical & Environmental

Frequency Range	500-750MHz	Impedance	50 Ohm
Input Port VSWR	1.2 max (Typ.1.16)		
Output Port VSWR	1.2 max (Typ.1.12)		
Insertion Loss	0.8dB max (Excluding theoretical loss未含理论损耗6.0dB)		
Isolation	30dB min (Typ.31dB)		
Amplitude Balance	± 0.2dB		
Phase Balance	±3°		
Input Avg Power	30 Watts max @25°C (Derate linearly to 3 Watt at 100°C) (Combiner合路器用时2W)		
Operating Temp	-45°C ~ +85°C		

Mechanical & Product Information

Product Number	RPD05F075B4, E-Grade	Way	4
Connector	BNC Female	Connector Body	Ternary alloy plated brass
Center Contact	Gold plated beryllium copper		
Housing	Black paint		
Dimensions	51×108×20mm	Net Weight	About 350.0g