


## SMA 4 Way Microstrip Power Divider, RPD0698F308S4 698-3800MHz, 50W , E-Grade

### Dimensions(mm) Tolerance±1%

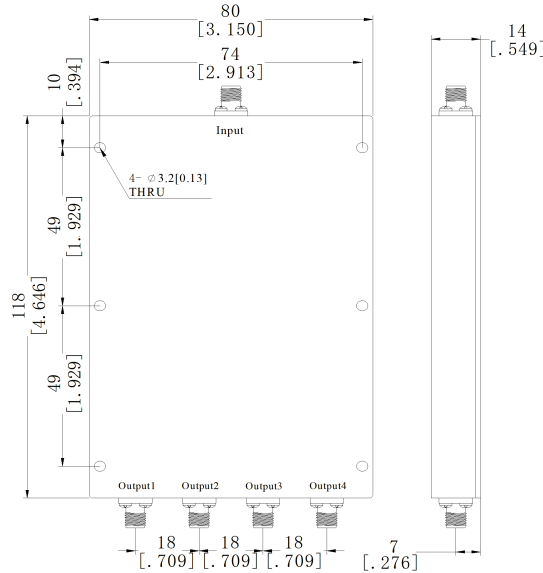

### Electrical & Environmental

<b>Frequency Range</b>	698-3800MHz	<b>Impedance</b>	50 Ohm
<b>Input Port VSWR</b>	1.25 max (Typ.1.11)		
<b>Output Port VSWR</b>	1.2 max (Typ.1.10)		
<b>Insertion Loss</b>	1.4dB max (Excluding theoretical loss未含理论损耗6.0dB)		
<b>Isolation</b>	20dB min (Typ.26dB)		
<b>Amplitude Balance</b>	± 0.2dB		
<b>Phase Balance</b>	±3°		
<b>Input Avg Power</b>	50 Watts max @25°C (Derate linearly to 5 Watt at 100°C) (Combiner合路器用时3W)		
<b>Operating Temp</b>	-30°C ~ +85°C		

### Mechanical & Product Information

<b>Product Number</b>	RPD0698F308S4, E-Grade	<b>Way</b>	4
<b>Connector</b>	SMA Female	<b>Connector Body</b>	Ternary alloy plated brass
<b>Center Contact</b>	Gold plated beryllium copper		
<b>Housing</b>	Sandblasting natural color conductive oxide		
<b>Dimensions</b>	118×80×14mm	<b>Net Weight</b>	About 200.0g