


N 3 Way Microstrip Power Divider, RPD0698F4N3 698-4000MHz, 50W , E-Grade

Dimensions(mm) Tolerance±1%

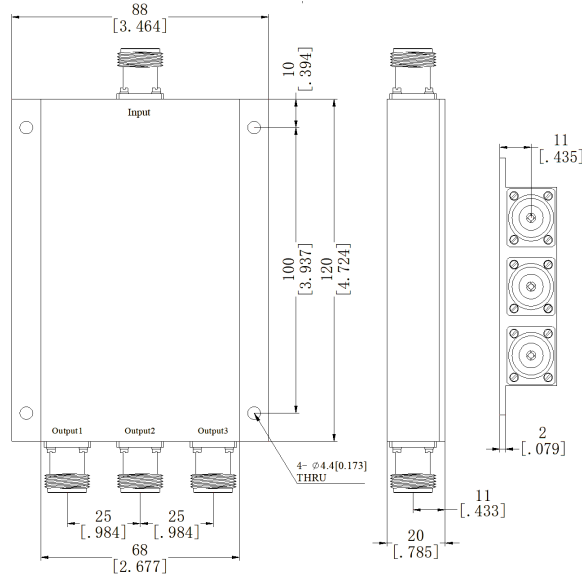

Electrical & Environmental

Frequency Range	698-4000MHz	Impedance	50 Ohm
Input Port VSWR	1.3 max (Typ.1.18)		
Output Port VSWR	1.25 max (Typ.1.12)		
Insertion Loss	1.6dB max (Excluding theoretical loss未含理论损耗4.8dB)		
Isolation	18dB min (Typ.24dB)		
Amplitude Balance	± 0.6dB		
Phase Balance	±6°		
Input Avg Power	50 Watts max @25°C (Derate linearly to 5 Watt at 100°C) (Combiner合路器用时3W)		
Operating Temp	-35°C ~ +70°C		

Mechanical & Product Information

Product Number	RPD0698F4N3, E-Grade	Way	3
Connector	N Female	Connector Body	Ternary alloy plated brass
Center Contact	Gold plated beryllium copper		
Housing	Sandblasting natural color conductive oxide		
Dimensions	120×88×20mm	Net Weight	-