


N 8 Way Microstrip Power Divider, RPD0698F4N8 698-4000MHz, 50W , E-Grade

Dimensions(mm) Tolerance±1%

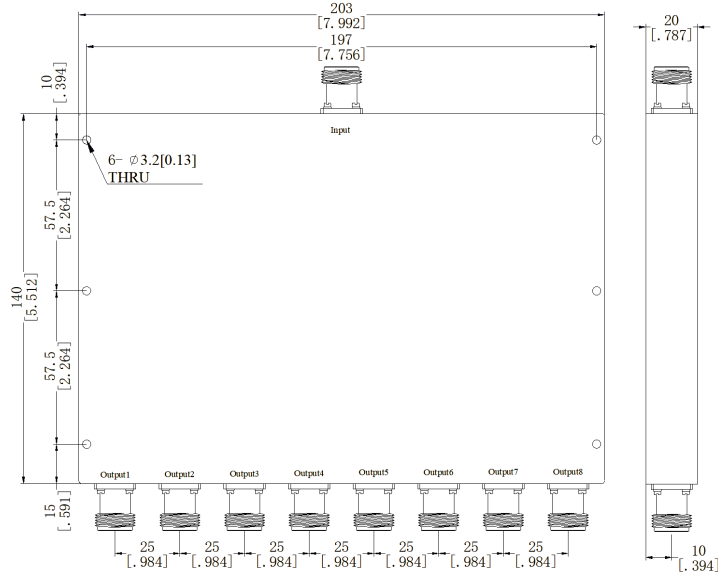

Electrical & Environmental

Frequency Range	698-4000MHz	Impedance	50 Ohm
Input Port VSWR	1.35 max (Typ.1.18)		
Output Port VSWR	1.25 max (Typ.1.12)		
Insertion Loss	2.8dB max (Excluding theoretical loss未含理论损耗9.0dB)		
Isolation	18dB min (Typ.24dB)		
Amplitude Balance	± 0.3 dB		
Phase Balance	$\pm 4^\circ$		
Input Avg Power	50 Watts max @25°C (Derate linearly to 5 Watt at 100°C) (Combiner合路器用时3W)		
Operating Temp	-35°C ~ +70°C		

Mechanical & Product Information

Product Number	RPD0698F4N8, E-Grade	Way	8
Connector	N Female	Connector Body	Ternary alloy plated brass
Center Contact	Gold plated beryllium copper		
Housing	Sandblasting natural color conductive oxide		
Dimensions	140×203×20mm	Net Weight	-