


N 2 Way Microstrip Power Divider, RPD08F1088N2W200 800-1880MHz, 200W

Dimensions(mm) Tolerance $\pm 1\%$

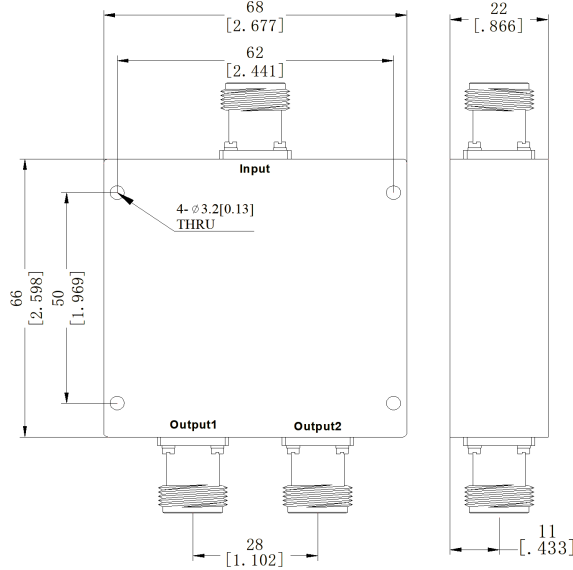

Electrical & Environmental

Frequency Range	800-1880MHz	Impedance	50 Ohm
Input Port VSWR	1.25 max		
Output Port VSWR	1.2 max		
Insertion Loss	0.3dB max (Excluding theoretical loss未含理论损耗3.0dB)		
Isolation	25dB min		
Amplitude Balance	± 0.2 dB		
Phase Balance	$\pm 2^\circ$		
Input Avg Power	200 Watts max @25°C (Derate linearly to 20 Watt at 100°C) (Combiner合路器用时20W)		
Operating Temp	-35°C ~ +75°C		

Mechanical & Product Information

Product Number	RPD08F1088N2W200	Way	2
Connector	N Female	Connector Body	Ternary alloy plated brass
Center Contact	Gold plated beryllium copper		
Housing	Sandblasting natural color conductive oxide		
Dimensions	66×68×22mm	Net Weight	-