


SMA 4 Way Microstrip Power Divider, RPD08F1S4W50 800-1000MHz, 50W , E-Grade

Dimensions(mm) Tolerance±1%

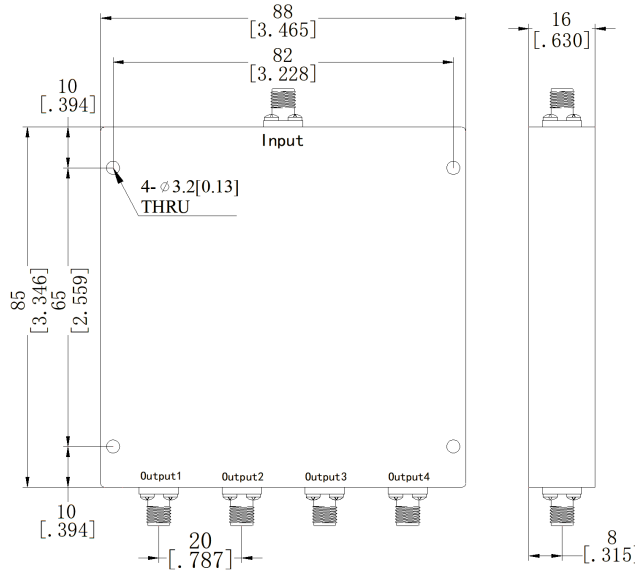

Electrical & Environmental

Frequency Range	800-1000MHz	Impedance	50 Ohm
Input Port VSWR	1.25 max (Typ.1.18)		
Output Port VSWR	1.2 max (Typ.1.12)		
Insertion Loss	0.6dB max (Excluding theoretical loss未含理论损耗6.0dB)		
Isolation	20dB min		
Amplitude Balance	± 0.2dB		
Phase Balance	±3°		
Input Avg Power	50 Watts max @25°C (Derate linearly to 5 Watt at 100°C) (Combiner合路器用时3W)		
Operating Temp	-35°C ~ +75°C		

Mechanical & Product Information

Product Number	RPD08F1S4W50, E-Grade	Way	4
Connector	SMA Female	Connector Body	Ternary alloy plated brass
Center Contact	Gold plated beryllium copper		
Housing	Sandblasting natural color conductive oxide		
Dimensions	85×88×16mm	Net Weight	-