




SMA 8 Way Microstrip Power Divider, RPD1035F1045S8 1.35-1.45GHz, 20W , P-Grade

Dimensions(mm) Tolerance±1%

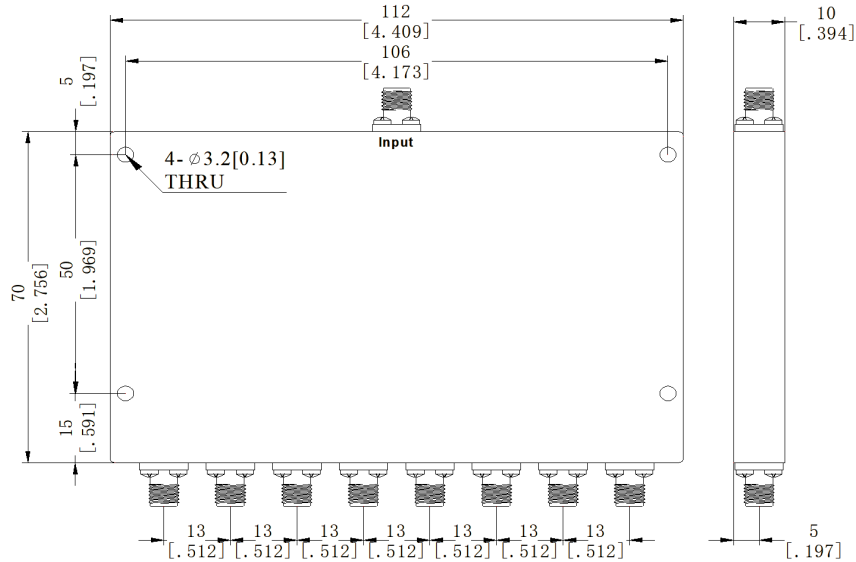

Electrical & Environmental

Frequency Range	1.35-1.45GHz	Impedance	50 Ohm
Input Port VSWR	1.2 max (Typ.1.18)		
Output Port VSWR	1.2 max (Typ.1.12)		
Insertion Loss	0.8dB max (Excluding theoretical loss未含理论损耗9.0dB)		
Isolation	20dB min (Typ.26dB)		
Amplitude Balance	± 0.3 dB		
Phase Balance	$\pm 3^\circ$		
Input Avg Power	20 Watts max @25°C (Derate linearly to 2 Watt at 100°C) (Combiner合路器用时1W)		
Operating Temp	-45°C ~ +85°C		

Mechanical & Product Information

Product Number	RPD1035F1045S8, P-Grade	Way	8
Connector	SMA Female	Connector Body	Passivated stainless steel
Center Contact	Gold plated beryllium copper		
Housing	Black paint		
Dimensions	112×70×10mm	Net Weight	About 185.0g



SMA 8 Way Microstrip Power Divider, RPD1035F1045S8

1.35-1.45GHz, 20W , P-Grade

Typical Test Data

