


SMA 6 Way Microstrip Power Divider, RPD1F105S6 1-1.5GHz, 30W , P-Grade

Dimensions(mm) Tolerance±1%

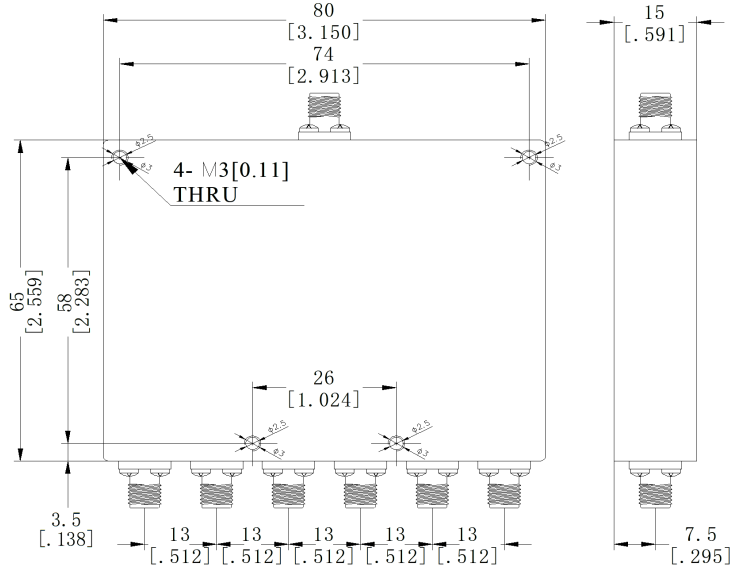

Electrical & Environmental

Frequency Range	1-1.5GHz	Impedance	50 Ohm
Input Port VSWR	1.4 max (Typ.1.18)		
Output Port VSWR	1.3 max (Typ.1.16)		
Insertion Loss	0.7dB max (Excluding theoretical loss未含理论损耗7.8dB)		
Isolation	20dB min (Typ.24dB)		
Amplitude Balance	± 0.3dB		
Phase Balance	±3°		
Input Avg Power	30 Watts max @25°C (Derate linearly to 3 Watt at 100°C) (Combiner合路器用时2W)		
Operating Temp	-55°C ~ +85°C		

Mechanical & Product Information

Product Number	RPD1F105S6, P-Grade	Way	6
Connector	SMA Female	Connector Body	Passivated stainless steel
Center Contact	Gold plated beryllium copper		
Housing	Black paint		
Dimensions	65×80×15mm	Net Weight	-