


2.92mm 2 Way Microstrip Power Divider, RPD26F28K2 26-28GHz, 20W

Dimensions(mm) Tolerance \pm 1%

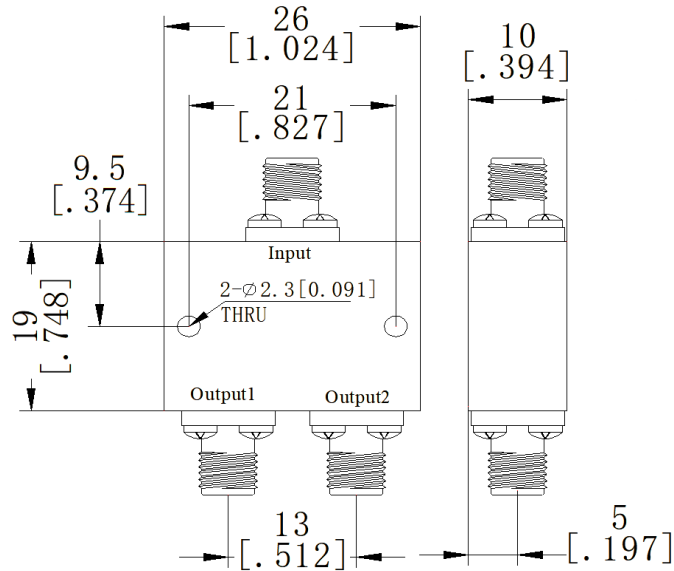

Electrical & Environmental

Frequency Range	26-28GHz	Impedance	50 Ohm
Input Port VSWR	1.4 max (Typ.1.26)		
Output Port VSWR	1.4 max (Typ.1.22)		
Insertion Loss	0.6dB max (Excluding theoretical loss未含理论损耗3.0dB)		
Isolation	20dB min (Typ.22dB)		
Amplitude Balance	\pm 0.2dB		
Phase Balance	\pm 3°		
Input Avg Power	20 Watts max @25°C (Derate linearly to 2 Watt at 100°C) (Combiner合路器用时1W)		
Operating Temp	-45°C ~ +85°C		

Mechanical & Product Information

Product Number	RPD26F28K2	Way	2
Connector	2.92mm Female	Connector Body	Passivated stainless steel
Center Contact	Gold plated beryllium copper		
Housing	Black paint		
Dimensions	19×26×10mm	Net Weight	About 21.0g