


2.92mm 2 Way Microstrip Power Divider, RPD26F30K2M 26-30GHz, 20W , P-Grade

Dimensions(mm) Tolerance±1%

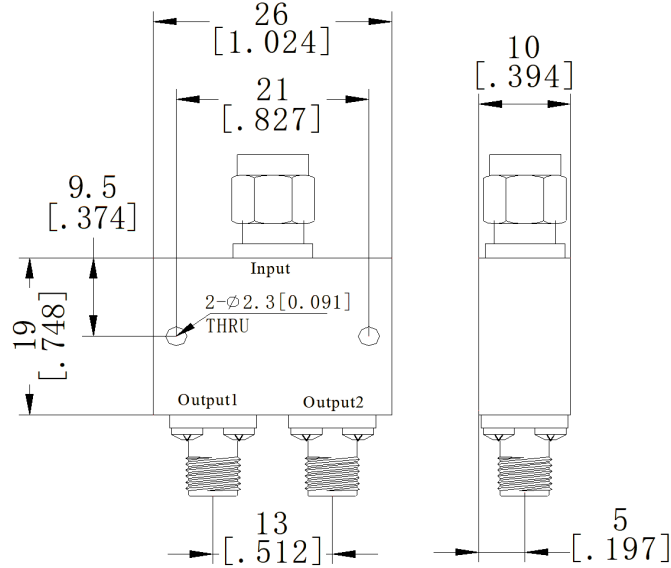

Electrical & Environmental

Frequency Range	26-30GHz	Impedance	50 Ohm
Input Port VSWR	1.5 max (Typ.1.28)		
Output Port VSWR	1.5 max (Typ.1.26)		
Insertion Loss	1.2dB max (Excluding theoretical loss未含理论损耗4.8dB)		
Isolation	16dB min (Typ.22dB)		
Amplitude Balance	± 0.4 dB		
Phase Balance	$\pm 4^\circ$		
Input Avg Power	20 Watts max @25°C (Derate linearly to 2 Watt at 100°C) (Combiner合路器用时1W)		
Operating Temp	-45°C ~ +85°C		

Mechanical & Product Information

Product Number	RPD26F30K2M, P-Grade	Way	2
Connector	2.92mm Male	Connector Body	Passivated stainless steel
Center Contact	Gold plated beryllium copper		
Housing	Black paint		
Dimensions	19×26×10mm	Net Weight	About 24.0g