


SMA 16 Way Resistive Power Divider, RPD2S16 100-2000MHz, 2W

Dimensions(mm) Tolerance $\pm 1\%$

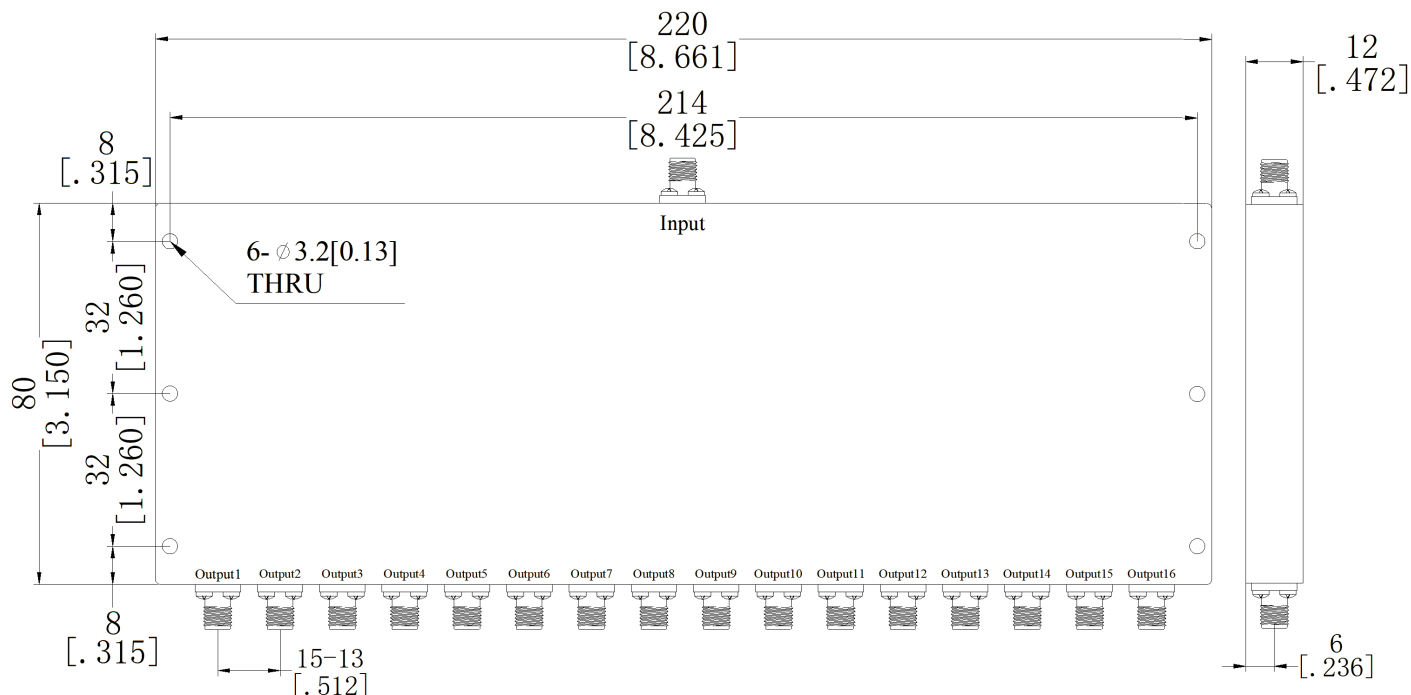

Electrical & Environmental

Frequency Range	100-2000MHz	Impedance	50 Ohm
Input Port VSWR	1.2 max (Typ.1.18)	Output Port VSWR	1.2 max (Typ.1.16)
Insertion Loss	26dB max		
Isolation	5.8dB min		
Amplitude Balance	± 0.5dB	Phase Balance	±5°
Input Avg Power	2 Watts max @25°C (Derate linearly to 0.2 Watt at 100°C)		
Operating Temp	-35°C ~ +75°C		

Mechanical & Product Information

Product Number	RPD2S16	Way	16
Connector	SMA Female	Connector Body	Ternary alloy plated brass
Center Contact	Gold plated beryllium copper		
Housing	Black paint		
Dimensions	80×220×12mm	Net Weight	-