


SMA 5 Way Resistive Power Divider, RPD3S5 DC-3GHz, 2W

Dimensions(mm) Tolerance $\pm 1\%$

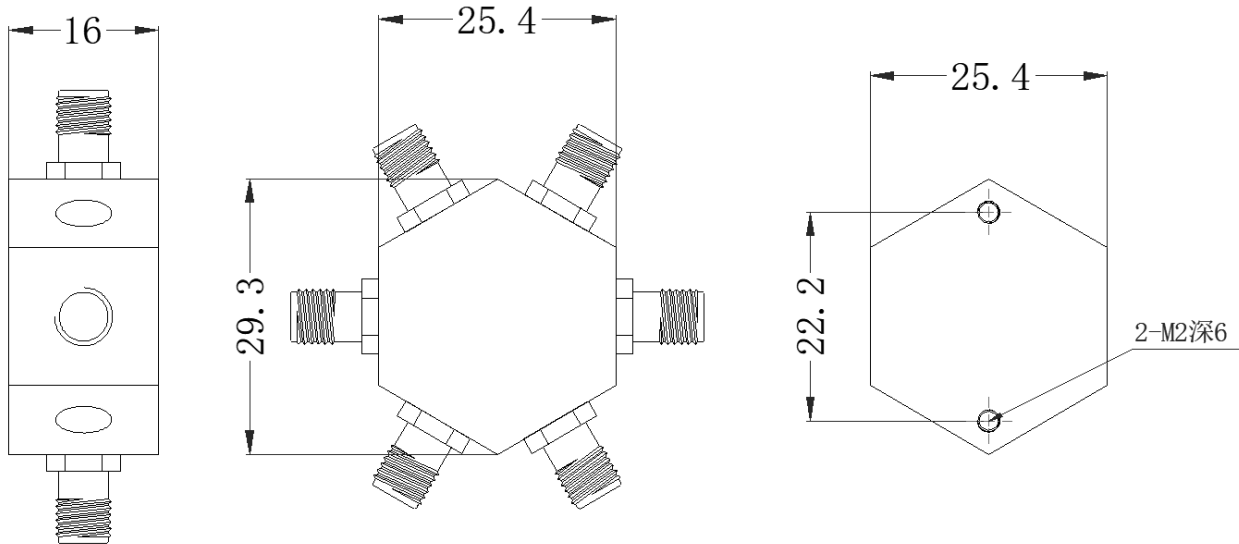

Electrical & Environmental

Frequency Range	DC-3GHz	Impedance	50 Ohm
Input Port VSWR	1.25 max (Typ.1.11)		
Output Port VSWR	1.25 max (Typ.1.10)		
Insertion Loss	17.5dB max		
Isolation	15dB min		
Amplitude Balance	± 0.8 dB		
Input Avg Power	2 Watts max @25°C (Derate linearly to 0.2 Watt at 100°C)		
Operating Temp	-35°C ~ +75°C		

Mechanical & Product Information

Product Number	RPD3S5	Way	5
Connector	SMA Female	Connector Body	Passivated stainless steel
Center Contact	Gold plated beryllium copper		
Housing	Sandblasting natural color conductive oxide		
Dimensions	25.4×29.3×16mm	Net Weight	About 150.0g