


2.92mm 4 Way Resistive Power Divider, RPD40K4 DC-40GHz, 1W , P-Grade

Dimensions(mm) Tolerance $\pm 1\%$

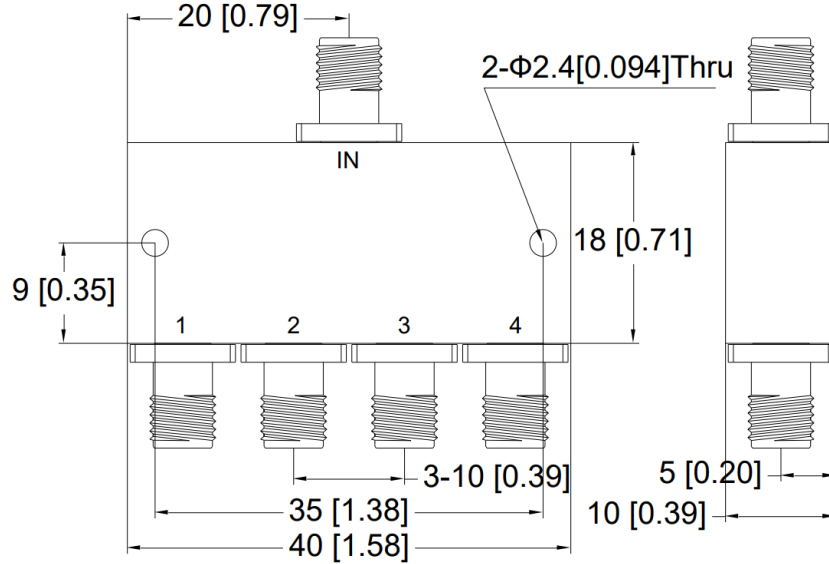

Electrical & Environmental

Frequency Range	DC-40GHz	Impedance	50 Ohm
Input Port VSWR	1.9 max (Typ.1.7)		
Output Port VSWR	2.5 max (Typ.2.0)		
Insertion Loss	3dB max (Typ.2.5dB / does not include theory loss 12dB)		
Isolation	10.5dB min		
Amplitude Balance	± 0.8 dB		
Phase Balance	$\pm 8^\circ$		
Input Avg Power	1 Watts max @25°C		
Operating Temp	-45°C ~ +85°C		

Mechanical & Product Information

Product Number	RPD40K4, P-Grade	Way	4
Connector	2.92mm Female	Connector Body	Passivated stainless steel
Center Contact	Gold plated beryllium copper		
Housing	Aluminum, Nickel Plated		
Dimensions	40×18×10mm	Net Weight	-