


N 6 Way Resistive Power Divider, RPD4N6 DC-4GHz, 2W

Dimensions(mm) Tolerance $\pm 1\%$

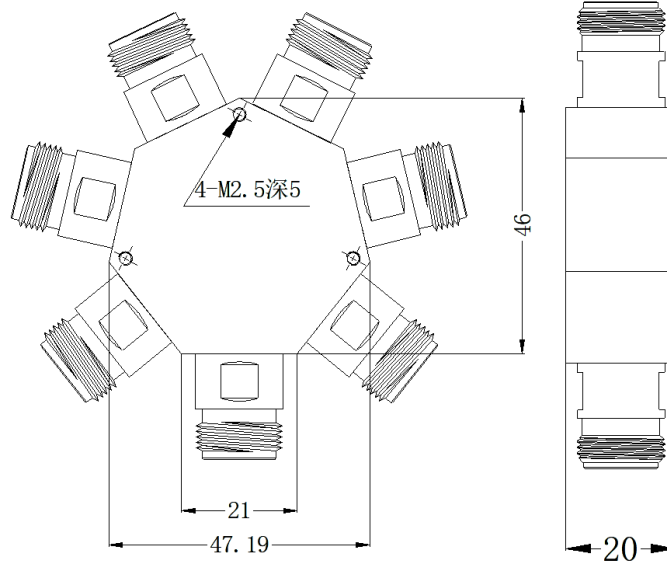

Electrical & Environmental

Frequency Range	DC-4GHz	Impedance	50 Ohm
Input Port VSWR	1.4 max (Typ.1.18)		
Output Port VSWR	1.4 max (Typ.1.15)		
Insertion Loss	16.5dB max ± 1.5 dB		
Isolation	15dB min		
Amplitude Balance	± 1.0 dB		
Input Avg Power	2 Watts max @25°C (Derate linearly to 0.2 Watt at 100°C)		
Operating Temp	-35°C ~ +75°C		

Mechanical & Product Information

Product Number	RPD4N6	Way	6
Connector	N Female	Connector Body	Ternary alloy plated brass
Center Contact	Gold plated beryllium copper		
Housing	Sandblasting natural color conductive oxide		
Dimensions	46×47.19×20mm	Net Weight	-