


SMA 16 Way Resistive Power Divider, RPD5S16

50-5000MHz, 2W

Dimensions(mm) Tolerance $\pm 1\%$

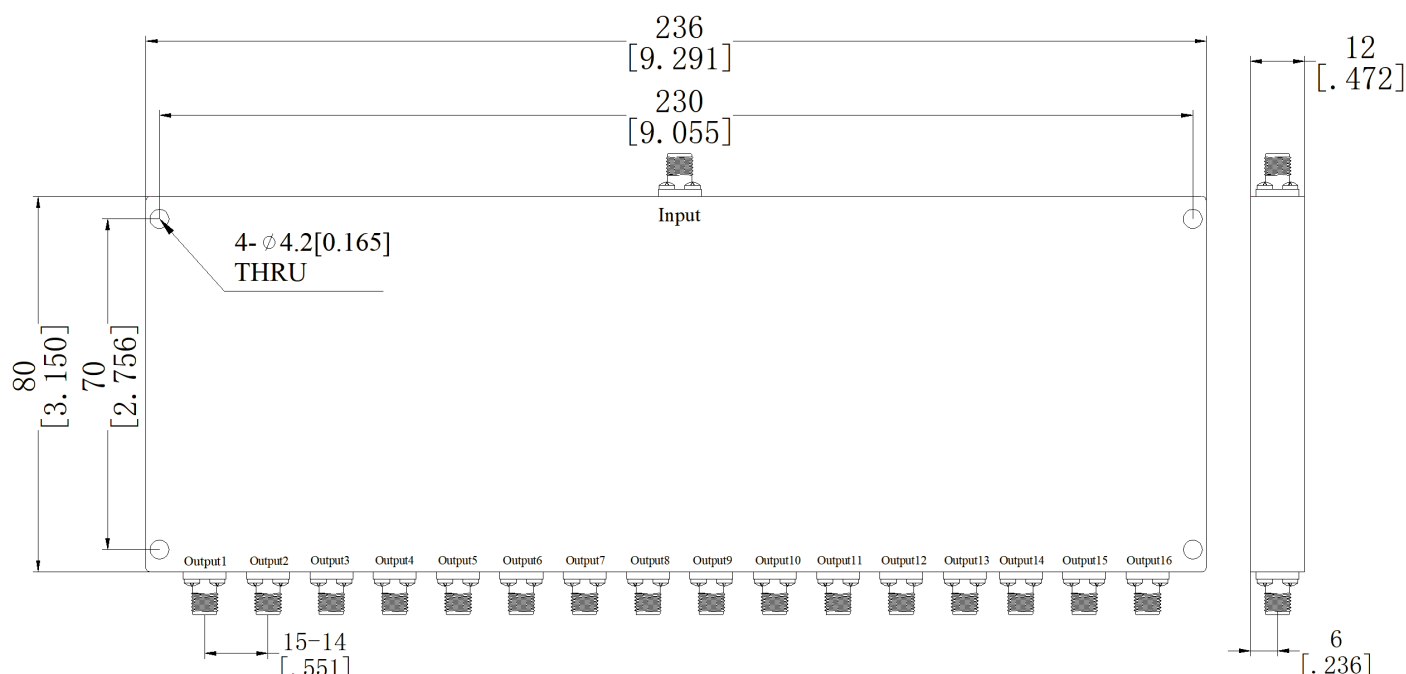

Electrical & Environmental

Frequency Range	50-5000MHz	Impedance	50 Ohm
Input Port VSWR	1.25 max (Typ.1.18)	Output Port VSWR	1.25 max (Typ.1.18)
Insertion Loss	28dB max		
Isolation	22dB min		
Amplitude Balance	$\pm 0.8\text{dB}$	Phase Balance	$\pm 8^\circ$
Input Avg Power	2 Watts max @25°C (Derate linearly to 0.2 Watt at 100°C)		
Operating Temp	-35°C ~ +75°C		

Mechanical & Product Information

Product Number	RPD5S16	Way	16
Connector	SMA Female	Connector Body	Passivated stainless steel
Center Contact	Gold plated beryllium copper		
Housing	Black paint		
Dimensions	80×236×12mm	Net Weight	About 575.0g