


SMA 6 Way Resistive Power Divider, RPD6S6-1 DC-6GHz, 2W

Dimensions(mm) Tolerance±1%

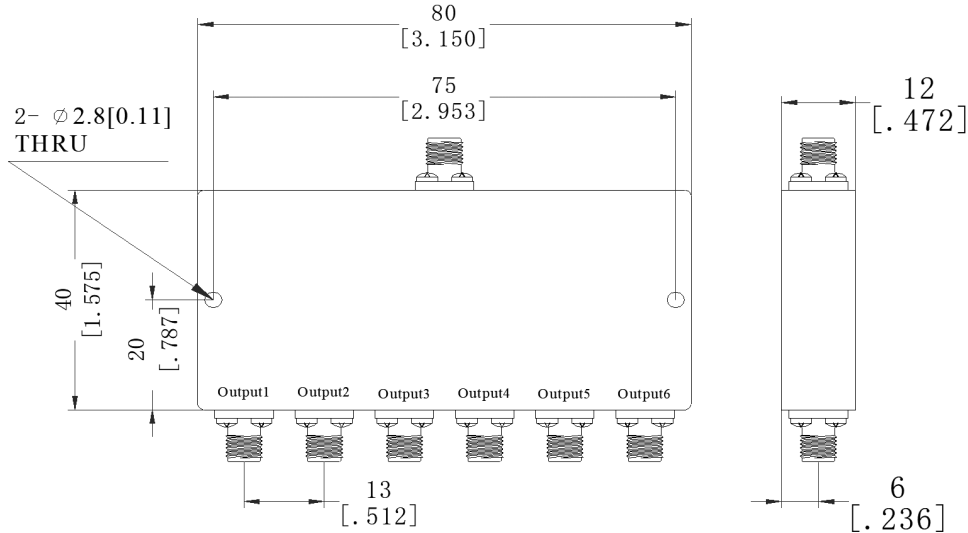

Electrical & Environmental

Frequency Range	DC-6GHz	Impedance	50 Ohm
Input Port VSWR	1.5 max (Typ.1.15)		
Output Port VSWR	1.5 max (Typ.1.15)		
Insertion Loss	17dB max		
Isolation	6dB min		
Amplitude Balance	± 0.8dB		
Phase Balance	±9°		
Input Avg Power	2 Watts max @25°C (Derate linearly to 0.2 Watt at 100°C)		
Operating Temp	-35°C ~ +75°C		

Mechanical & Product Information

Product Number	RPD6S6-1	Way	6
Connector	SMA Female	Connector Body	Passivated stainless steel
Center Contact	Gold plated beryllium copper		
Housing	Black paint		
Dimensions	40×80×12mm	Net Weight	About 135.0g