


SMA 32 Way Microstrip Power Divider, RPD8F15S32 8-15GHz, 20W , P-Grade

Dimensions(mm) Tolerance±1%

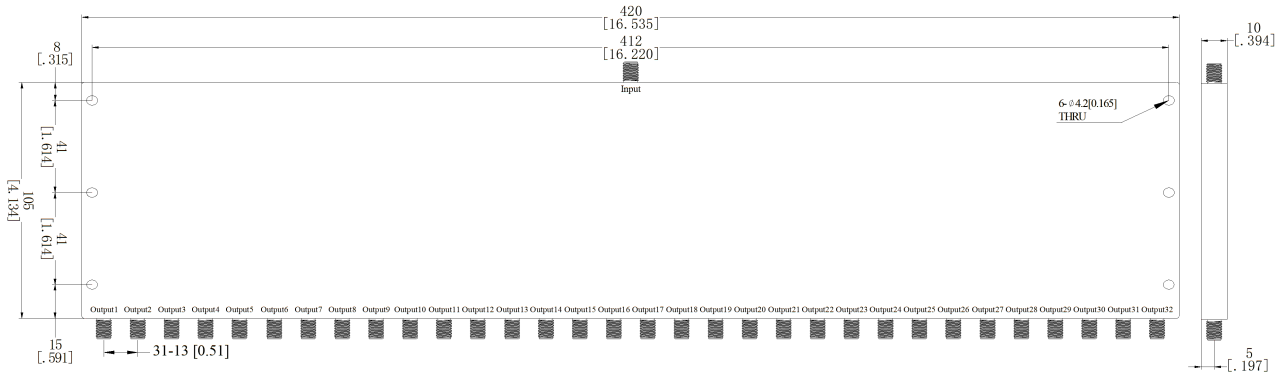

Electrical & Environmental

Frequency Range	8-15GHz	Impedance	50 Ohm
Input Port VSWR	1.9 max (Typ.1.45)		
Output Port VSWR	1.6 max (Typ.1.25)		
Insertion Loss	3.5dB max (Excluding theoretical loss未含理论损耗15.0dB)		
Isolation	16dB min (Typ.26dB)		
Amplitude Balance	± 0.8dB		
Phase Balance	±10°		
Input Avg Power	20 Watts max @25°C (Derate linearly to 2 Watt at 100°C) (Combiner合路器用时1W)		
Operating Temp	-45°C ~ +85°C		

Mechanical & Product Information

Product Number	RPD8F15S32, P-Grade	Way	32
Connector	SMA Female	Connector Body	Passivated stainless steel
Center Contact	Gold plated beryllium copper		
Housing	Black paint		
Dimensions	106×420×10mm	Net Weight	About 1.5kg