


SMA 32 Way Microstrip Power Divider, RPD902F908S32 9200-9800MHz, 20W , P-Grade

Dimensions(mm) Tolerance±1%

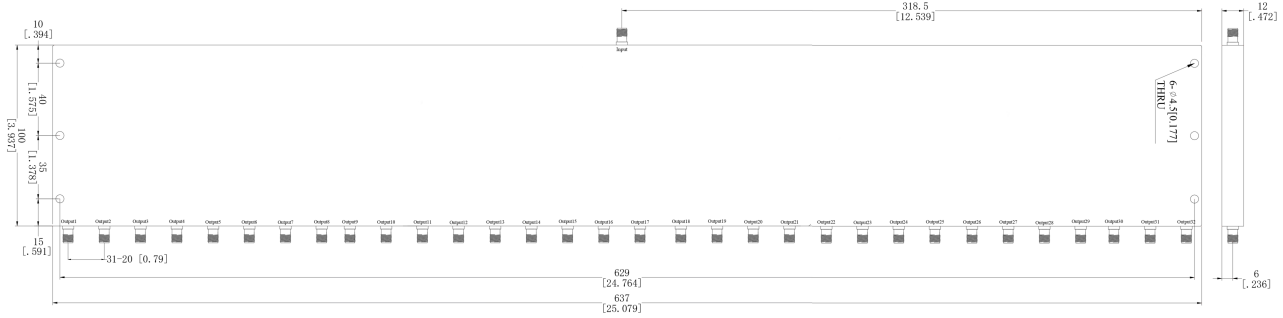

Electrical & Environmental

Frequency Range	9200-9800MHz	Impedance	50 Ohm
Input Port VSWR	1.5 max (Typ.1.22)		
Output Port VSWR	1.25 max (Typ.1.16)		
Insertion Loss	2dB max (Excluding theoretical loss 未含理论损耗15.0dB)		
Isolation	18dB min (Typ.24dB)		
Amplitude Balance	± 0.4dB		
Phase Balance	±8°		
Input Avg Power	20 Watts max @25°C (Derate linearly to 2 Watt at 100°C) (Combiner合路器用时1W)		
Operating Temp	-45°C ~ +85°C		

Mechanical & Product Information

Product Number	RPD902F908S32, P-Grade	Way	32
Connector	SMA Female	Connector Body	Passivated stainless steel
Center Contact	Gold plated beryllium copper		
Housing	Black paint		
Dimensions	637×100×12mm	Net Weight	-