


SMA 3 Way LC Power Divider, RPDLC001F03S3 10-300MHz, 1W

Dimensions(mm) Tolerance±1%

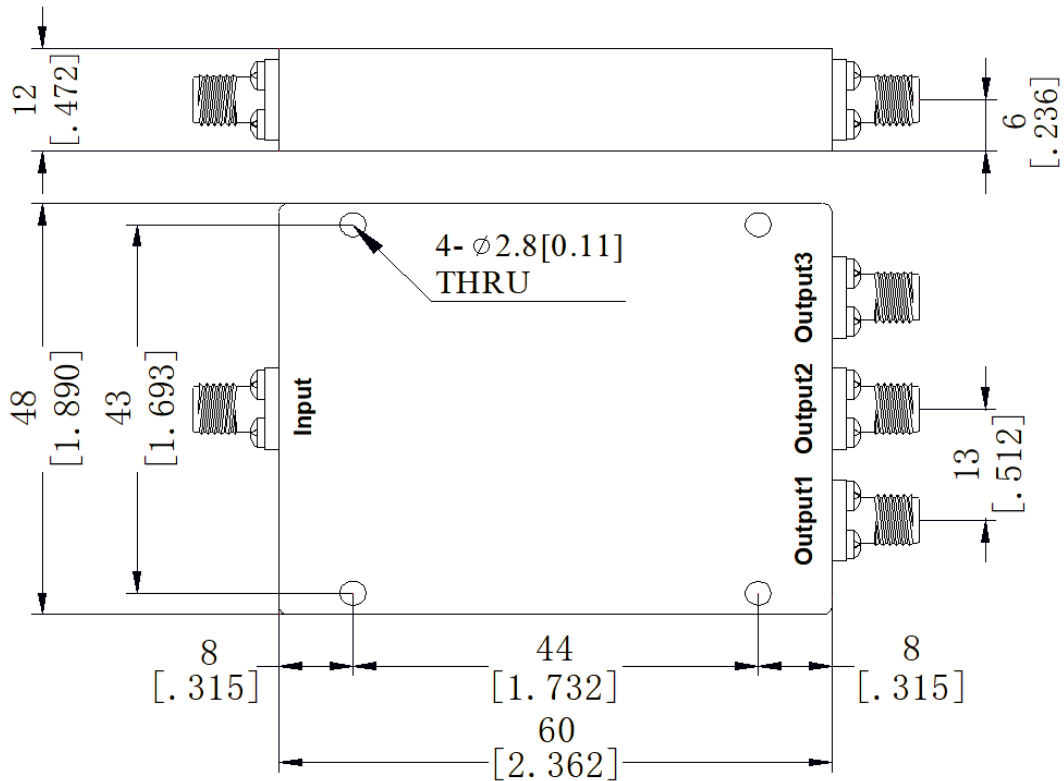

Electrical & Environmental

Frequency Range	10-300MHz	Impedance	50 Ohm
Input Port VSWR	1.45 max (Typ.1.28)	Output Port VSWR	1.25 max (Typ.1.19)
Insertion Loss	1dB max (Excluding theoretical loss未含理论损耗4.8dB)		
Isolation	18dB min (Typ.30dB)		
Amplitude Balance	± 0.4dB	Phase Balance	±4°
Input Avg Power	1 Watts max @25°C		
Operating Temp	-35°C ~ +75°C		

Mechanical & Product Information

Product Number	RPDLC001F03S3	Way	3
Connector	SMA Female	Connector Body	Passivated stainless steel
Center Contact	Gold plated beryllium copper		
Housing	Sandblasting natural color conductive oxide		
Dimensions	60×48×12mm	Net Weight	About 85.0g